


2147/5

HSSE DIN 376


UNC  
ANSI/ASME  
B1.1Form.  
CTol.  
2B

1,5XD

D

P				M		K			N				S		H		
<800	<1.000	<1.200	<1.400	<950	<1.200	<500	<800	<1.400	Al	Cu	Mg/Zn	Plastic	Ni	Ti	50 HRC	55 HRC	60 HRC
● 10-25	○ 10-15						○ 10-15			○ 10-20							

Vc (m/min). ● Optima / Optimun ○ Alternativo / Alternative

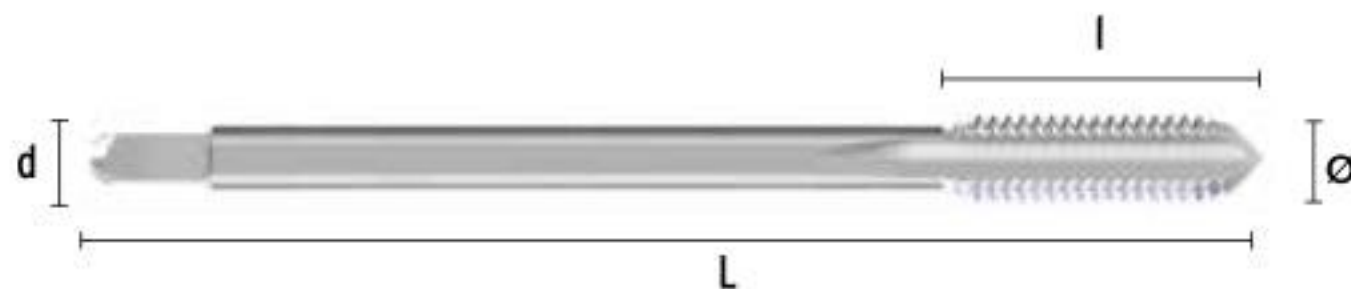

Ø	P
1/4	20,00
5/16	18,00
3/8	16,00
7/16	14,00
1/2	13,00

L mm	l mm	∅ mm	d mm
80	18	3,40	4,5
90	20	4,90	6,0
100	22	5,50	7,0
100	22	6,20	8,0
110	27	7,00	9,0

Ø	P
9/16	12,00
5/8	11,00
3/4	10,00
7/8	9,00
1"	8,00

L mm	l mm	∅ mm	d mm
110	30	9,00	11,0
110	30	9,00	12,0
125	35	11,00	14,0
140	36	14,50	18,0
160	38	16,00	20,0

\*Hasta fin de existencias / Jusqu'à epuisement des stocks / Until end of stock