



VAP-1



VAP-2



VAP-3

90° V-way. High carbon steel hardened to 50°-54° HRC, precision ground to within 0.005mm accuracy in squareness. Angle tolerance ± 10 minutes. Sets any angle 0-60°, vernier reading 10 minutes. 2 set screws provided for firmlocking at fixed angle.



Material: SK2

Hardness: HRC 50°-54°


Squareness: ± 0.01 mm

Angular measures from 0°-60°


✗ Not for LAB

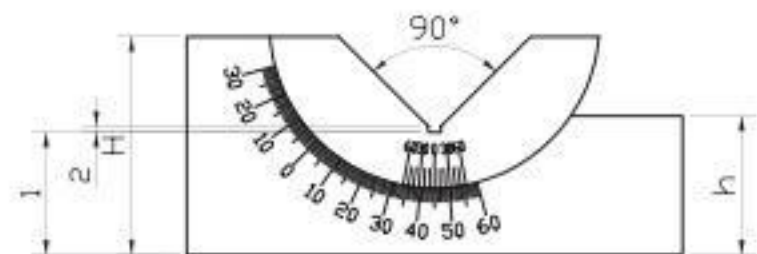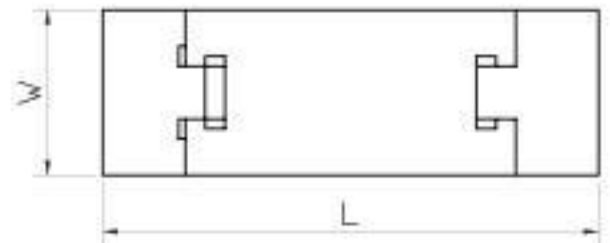

1. USING ON THE MILLING MACHINE



2. USING ON THE GRINDING MACHINE.



IT CAN BE LOCKED AT DESIRED ANGLE FROM THE BOTTOM.



3. TO MARK OUT ON A WORKPIECE.



4. USING ON THE DRILLING MACHINE.

Unit:mm

ORDER NO.	H	W	L	h	N.W. (KGS)	CODE NO.
VAP-1	48	45	102	28	1.4	2005-001
VAP-2	49	30	102	28	0.9	2005-002
VAP-3	32.5	25	75	21	0.5	2005-003