

Good Design With High Precision And Rigid

Accuracy :

Material Hardened: SKS2 HRC 60° Sub-zero processing.

Parallelism: Within 0.003 / 100 mm

Squareness: Within 0.005 / 100 mm


Angle tol: Within 15 sec Within 20 sec

Material: SKS2

*Sine conversion table attached page B16



Fixed Down Jaw Designed

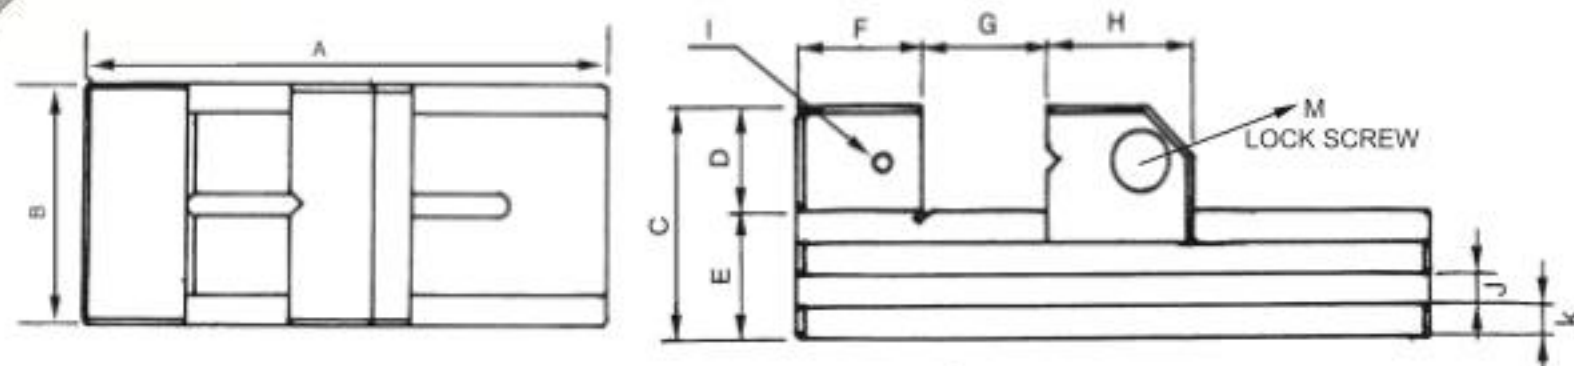

ORDER NO.	A	B	C	D	E	F	G	H	I	J	K	M	N.W (kgs)	CODE NO.
VC20	150	48	53	25	28	25	85	40	M6	8x5	8	M6x40L	1.6	2003-070
VC25	176	63	59	30	29	30	98	48	M6	8x5	8	M8x45L	2.8	2003-071
VC30	190	73	68	35	33	35	102	53	M6	8x6	10	M8x50L	4	2003-072
VC40	245	98	90	45	45	45	135	65	M8	12		M10x60L	9.02	2003-073