

Soft Jaw Forming Ring



The size can be adjusted against the helical slot.

Bias pin can be rotated 180 degree for different size to extend a clamping range.

Don't need to drill new hole. The hole on the soft jaws can be used directly for bias pin.

The material, is hardened and ground, can last for a long time.

FAETURES

CHUCK NOT INCLUDED

- Forming ring is available for 5", 6", 8", 10" & 12" power chuck.
- The clamping force is increasing. the roundness and vibration caused by eccentricity can be improved. The cutting accuracy is much better because of no taper hole(as fig.3) and less vibration.
- Both Clamping(as fig.1) and extension (as fig. 2) are available. Meanwhile ,the size adjusting is at will, the operation is easy and enduring.
- More improvement for used chuck to have better accuracy & strong clamping force .
- For CNC Lathe.



INSTRUCTION

Because the forming ring is used for cutting soft jaws by clamping and with extending.

through-hole could increase the accuracy of clamping work piece. (please refer to fig.1.2&3)

As fig.4 the soft jaw is created without forming ring. Cause bad accuracy.

The clamping force is not stable & vibration will occur.

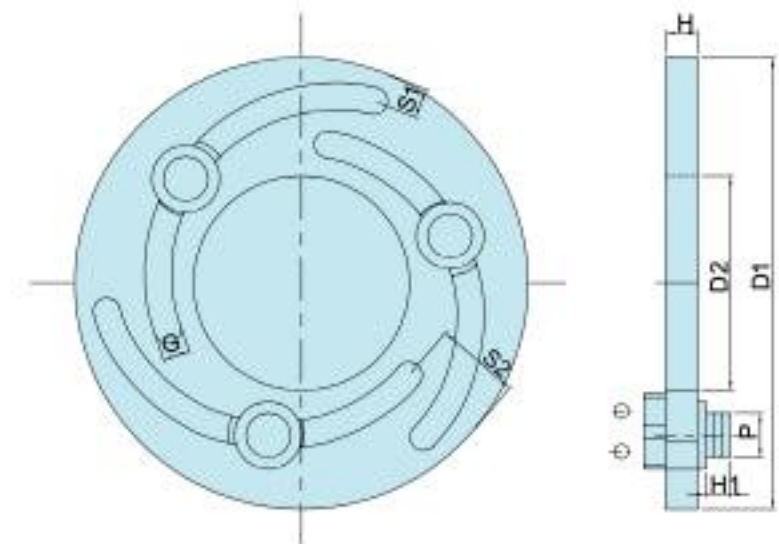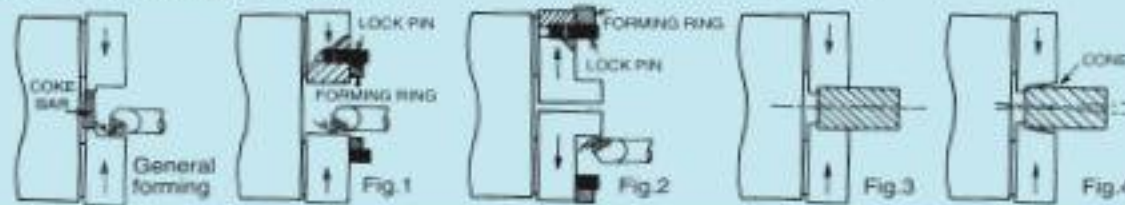

ORDER NO.	SUIT TO SK-CHUCK SIZE	H	D1	D2	S1	S2	G	H1	O	KGS	CODE NO.
VFR-05	5"	12	140	60	12	28	10	9	13.5	1	5002-360
VFR-06	6"	12	168	80	12	32	10	9	16.5	1.5	5002-361
VFR-08	8"	12	218	115	17	36	10	9	18.5	2.4	5002-362
VFR-10	10"	12	258	150	15	40	10	9	18.5	3	5002-363
VFR-12	12"	15	316	188	21	50	10	9	21.5	5	5002-364
VFR-15	15"	20	380	230	23	52	12	16	31	10.1	5002-365