




Live Lathe Center

NEW

LIGHT DUTY

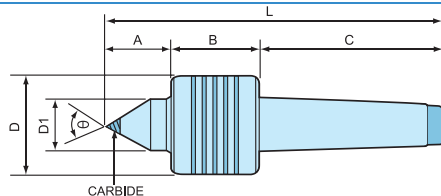

- K20 carbide tipped, HRC 70°
- Hardened & prcision ground
- Concentricity : 0.0002" (±0.005mm)

※Suggested tailstock pressure under 6 kg/cm²

ORDER NO.	TYPE	A	B	C	D	D1	L	SPEED MAX. R.P.M.	θ	WORK LOADING-KGS	G.W. weight kgs	CODE NO
VLC-172	MT2	32	40	72	41	25	144	2300	60°	60	0.55	5001-131
VLC-173	MT3	34	45	88	45	30	167	2000	60°	160	0.84	5001-132
VLC-174	MT4	34	45	109	45	30	188	1800	60°	300	1.15	5001-133
VLC-175	MT5	50	61	134	68	45	245	1500	60°	800	3.3	5001-134