



Fine Pole Magnetic Plate



SIDE MAGNETIC FORCE 21KGF
PLATE CENTER 30 KGF
550 GAUSS




A TYPE




Suit for work piece thickness $\leq 2\text{mm}$, length $\geq 25\text{mm}$
 Mag. force : 550 GS.

S TYPE

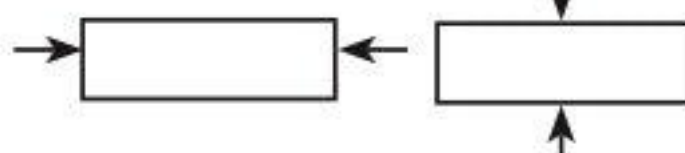

Good for workpiece smaller in length & width

TESTING BLOCK
 □ 25X25X20mm
 BLOCK (TUNGSTEN)

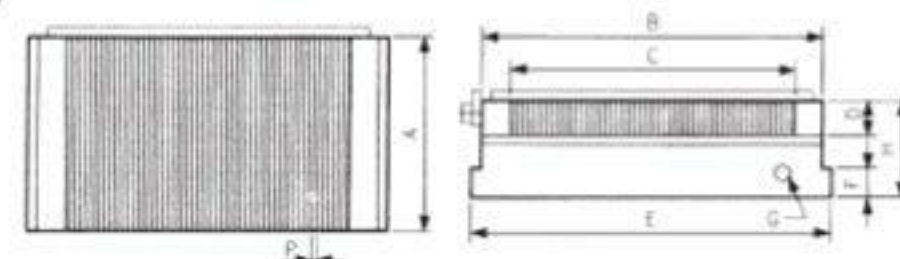

A TYPE

S TYPE



FEATURES

Thin and light weight to meet versatile applications.

Fine-pitched magnetic poles on this micropitch model. Make it ideally suitable for small and thin works.

Hexagonal wrench key is used for the magnetic ON/OFF change over handle. It is inserted through the side, easily removed and operates lightly.

The chuck surface has a wider effective magnetic area than other chuck of similar type.

Unit:mm

ORDER NO.	SIZE	CHUCKING SIZE				POLE PITCH	CHUCK MOUNTING FACE			HEIGHT	WEIGHT KGS	CODE NO.
		A	B	C	D		A	E	F			
VRTW-1018A	100X175	100	175	146	18	2.5 (1+1.5)	100	195	15	50	7.7	2015-130
VRTW-1515A	150X150	150	150	116			150	170	15		9.8	2015-131
VRTW-1530A	150X300	150	300	256			150	320	15		18.7	2015-132
VRTW-1535A	150X350	150	350	306			150	370	15		21.4	2015-133
VRTW-1540A	150x400	150	400	356			150	420	15		23.7	2015-134
VRTW-1545A	150X450	150	450	406			150	470	15		27.4	2015-135
VRTW-2040A	200X400	200	400	356			200	420	15		32.5	2015-137
VRTW-2045A	200X450	200	450	406			200	470	15		36.4	2015-138
VRTW-1224A	300X600	306	600	556			300	620	15		73	2015-138A
VRTW-1018S	100X175	100	175	146			100	175	-		8	2015-139
VRTW-1515S	150X150	150	150	121	20	2.5 (1+1.5)	150	150	-	50	9	2015-140
VRTW-1530S	150X300	150	300	256			150	300	-		20	2015-141
VRTW-1325S	125X250	125	250	206			125	250	15		13.1	2015-142