

YE-DD24

EUROPE



SOLID CARBIDE **DREAM DRILLS**

PRO with/without Coolant Holes

NEW X with/without Coolant Holes

GENERAL with/without Coolant Holes

HIGH FEED with Coolant Holes

FLAT BOTTOM with/without Coolant Holes

INOX with Coolant Holes

ALU with Coolant Holes

MTL TYPE with Coolant Holes(10xD - 40xD)

for HIGH HARDENED STEELS HRc50-70

◎ : Excellent ○ : Good

2 **YG-1 CO., LTD.** · Phone: +82-32-526-0909, www.yg1.solutions, E-mail: yg1@yg1.solutions

• Phone: +82-32-526-0909, www.yg1.solutions, E-mail: yg1@yg1.solutions  **YG-1 CO., LTD.** **3**


**CARBIDE
TEAM
MILLS**

4 **YG-1 CO., LTD.** · Phone: +82-32-526-0909, www.yg1.solutions, E-mail: yg1@yg1.solutions


· Phone: +82-32-526-0909, www.yg1.solutions, E-mail: yg1@yg1.solutions **YG-1 CO., LTD.** **5**

· Phone: +82-32-526-0909, www.yg1.solutions, E-mail: yg1@yg1.solutions


DREAM DRILLS GENERAL




140 Degree Point Angle
for good centering and low thrust




Wave Shape Cutting Edge
will allow low thrust, stable torque and long tool life



Radius Thinning
for Self Centering and Chip Breaking



Optimized Flute Shape
for strength of drill and smooth chip evacuation




Negative Land on the cutting edge
for Reliable Tool Life

TiAlN Coating

(Upgraded Titanium Aluminum Nitride :
nano-Layer coating)

- Higher wear resistance and Lower friction
- Higher Cutting Speed and Feed
- Improved drill Hole Quality

Special surface treatment after coating
to reduce friction and better chip flow.




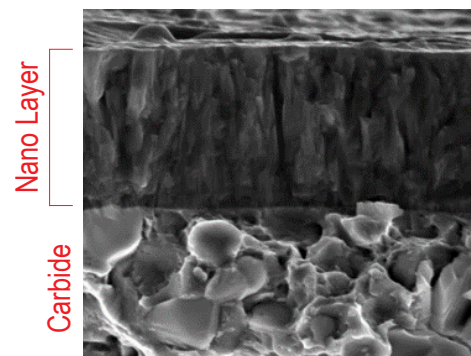


Micro-grained carbide for wear resistance and longer tool life

CASE STUDY

►SOLID CARBIDE DREAM DRILLS - General with Coolant Holes




CUTTING CONDITION	
Tool	DH408015 (Dream Drill with Coolant Holes)
Size(mm)	Ø1.5 x Ø3 x 15 x 55
Work Material	• DIN: X40GrMoV51 • WR: 1.2344 • JIS: SKD61 (HRc30)
RPM	14,856 rev./min.
Feed	0.05 mm/rev.
Drilling Depth	7.5 mm
Coolant	Wet Cut

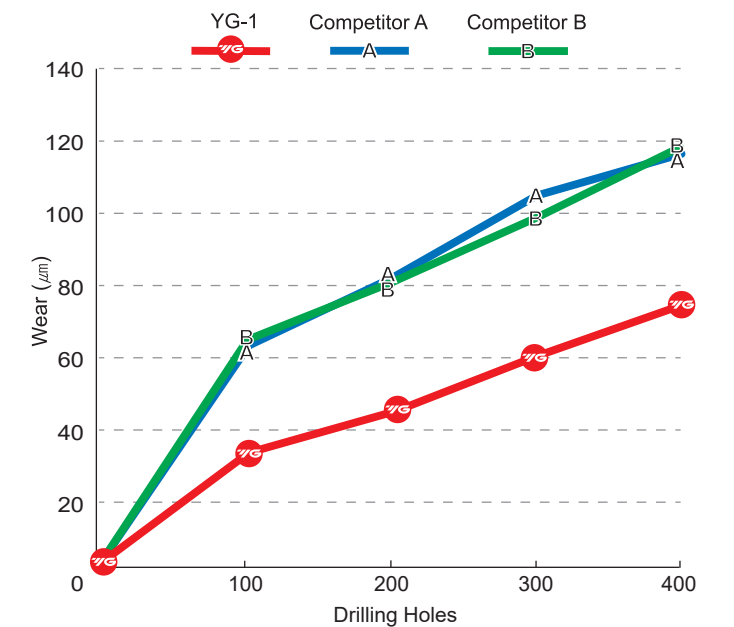


Total Drilling 400 Holes






Competitor A



Total Drilling 400 Holes

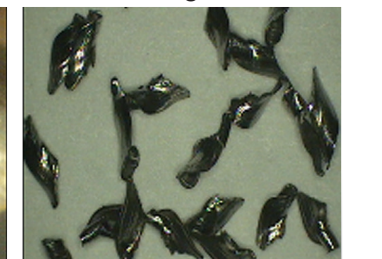

Competitor B



Total Drilling 400 Holes




TiAIN-COATED SOLID CARBIDE

DREAM DRILLS GENERAL without COOLANT HOLES (3XD)

SERIES

DH404

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

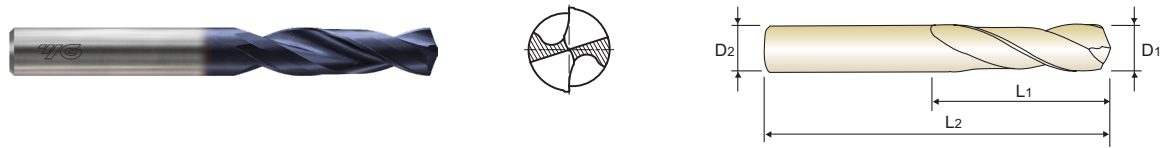

STUB
3 × D

Unit : mm				Unit : mm			
EDP No.	Drill Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Flute Length	Overall Length
TiAIN	D1=D2	L1	L2	TiAIN	D1=D2	L1	L2
DH404030	3.0	16	46	DH404058	5.8	28	66
DH404031	3.1	18	49	DH404059	5.9	28	66
DH404032	3.2	18	49	DH404060	6.0	28	66
DH404033	3.3	18	49	DH404061	6.1	31	70
DH404034	3.4	20	52	DH404062	6.2	31	70
DH404035	3.5	20	52	DH404063	6.3	31	70
DH404036	3.6	20	52	DH404064	6.4	31	70
DH404037	3.7	20	52	DH404065	6.5	31	70
DH404038	3.8	22	55	DH404066	6.6	31	70
DH404039	3.9	22	55	DH404067	6.7	31	70
DH404040	4.0	22	55	DH404068	6.8	34	74
DH404041	4.1	22	55	DH404069	6.9	34	74
DH404042	4.2	22	55	DH404070	7.0	34	74
DH404043	4.3	24	58	DH404071	7.1	34	74
DH404044	4.4	24	58	DH404072	7.2	34	74
DH404045	4.5	24	58	DH404073	7.3	34	74
DH404046	4.6	24	58	DH404074	7.4	34	74
DH404047	4.7	24	58	DH404075	7.5	34	74
DH404048	4.8	26	62	DH404076	7.6	37	79
DH404049	4.9	26	62	DH404077	7.7	37	79
DH404050	5.0	26	62	DH404078	7.8	37	79
DH404051	5.1	26	62	DH404079	7.9	37	79
DH404052	5.2	26	62	DH404080	8.0	37	79
DH404053	5.3	26	62	DH404081	8.1	37	79
DH404054	5.4	28	66	DH404082	8.2	37	79
DH404055	5.5	28	66	DH404083	8.3	37	79
DH404056	5.6	28	66	DH404084	8.4	37	79
DH404057	5.7	28	66	DH404085	8.5	37	79

▶ Other shank types are available on your request.

▶ NEXT PAGE

ISO		P										M					K				
Material Description		Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
VDI 3323		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC		13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB		125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended		◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO		N										S					H				
Material Description		Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323		21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRC		13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB		60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	550	630	400
Recommended		◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


TiAIN-COATED SOLID CARBIDE

DREAM DRILLS GENERAL without COOLANT HOLES (3XD)

SERIES

DH404

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

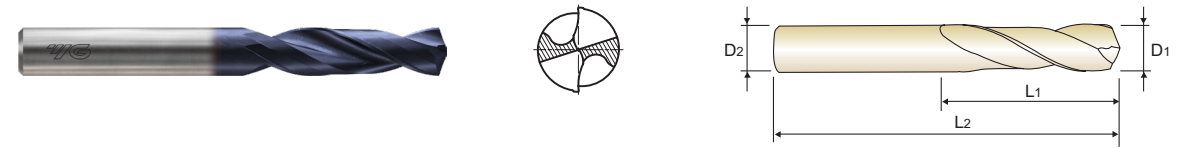

STUB
3 × D

Unit : mm				Unit : mm			
EDP No.	Drill Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Flute Length	Overall Length
TiAIN	D1=D2	L1	L2	TiAIN	D1=D2	L1	L2
DH404086	8.6	40	84	DH404170	17.0	60	119
DH404087	8.7	40	84	DH404175	17.5	62	123
DH404088	8.8	40	84	DH404180	18.0	62	123
DH404089	8.9	40	84	DH404185	18.5	64	127
DH404090	9.0	40	84	DH404190	19.0	64	127
DH404091	9.1	40	84	DH404195	19.5	66	131
DH404092	9.2	40	84	DH404200	20.0	66	131
DH404093	9.3	40	84				
DH404094	9.4	40	84				
DH404095	9.5	40	84				
DH404096	9.6	43	89				
DH404097	9.7	43	89				
DH404098	9.8	43	89				
DH404099	9.9	43	89				
DH404100	10.0	43	89				
DH404102	10.2	43	89				
DH404105	10.5	43	89				
DH404110	11.0	47	95				
DH404115	11.5	47	95				
DH404120	12.0	51	102				
DH404130	13.0	51	102				
DH404135	13.5	54	107				
DH404140	14.0	54	107				
DH404145	14.5	56	111				
DH404150	15.0	56	111				
DH404155	15.5	58	115				
DH404160	16.0	58	115				
DH404165	16.5	60	119				

▶ Other shank types are available on your request.

ISO		P										M					K				
Material Description		Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
VDI 3323		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC		13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB		125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended		◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO		N										S					H				
Material Description		Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323		21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRC		13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB		60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	550	630	400
Recommended		◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

TiAIN-COATED SOLID CARBIDE

DREAM DRILLS GENERAL without COOLANT HOLES (3XD)


- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

PLAIN SHANK

DH423

FLAT SHANK

DH443

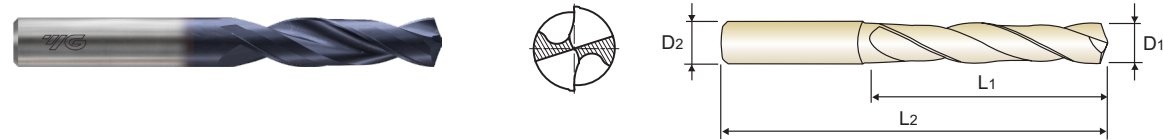

SHORT
3 × D

EDP No.		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH423030	DH443030	3.0	6	20	62
DH423031	DH443031	3.1	6	20	62
DH423032	DH443032	3.2	6	20	62
DH423033	DH443033	3.3	6	20	62
DH423034	DH443034	3.4	6	20	62
DH423035	DH443035	3.5	6	20	62
DH423036	DH443036	3.6	6	20	62
DH423037	DH443037	3.7	6	20	62
DH423038	DH443038	3.8	6	24	66
DH423039	DH443039	3.9	6	24	66
DH423040	DH443040	4.0	6	24	66
DH423041	DH443041	4.1	6	24	66
DH423042	DH443042	4.2	6	24	66
DH423043	DH443043	4.3	6	24	66
DH423044	DH443044	4.4	6	24	66
DH423045	DH443045	4.5	6	24	66
DH423046	DH443046	4.6	6	24	66
DH423047	DH443047	4.7	6	24	66
DH423048	DH443048	4.8	6	28	66
DH423049	DH443049	4.9	6	28	66
DH423050	DH443050	5.0	6	28	66
DH423051	DH443051	5.1	6	28	66
DH423052	DH443052	5.2	6	28	66
DH423053	DH443053	5.3	6	28	66
DH423054	DH443054	5.4	6	28	66
DH423055	DH443055	5.5	6	28	66
DH423056	DH443056	5.6	6	28	66
DH423057	DH443057	5.7	6	28	66
DH423058	DH443058	5.8	6	28	66
DH423059	DH443059	5.9	6	28	66

EDP No.		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH423060	DH443060	6.0	6	28	66
DH423061	DH443061	6.1	8	34	79
DH423062	DH443062	6.2	8	34	79
DH423063	DH443063	6.3	8	34	79
DH423064	DH443064	6.4	8	34	79
DH423065	DH443065	6.5	8	34	79
DH423066	DH443066	6.6	8	34	79
DH423067	DH443067	6.7	8	34	79
DH423068	DH443068	6.8	8	34	79
DH423069	DH443069	6.9	8	34	79
DH423070	DH443070	7.0	8	34	79
DH423071	DH443071	7.1	8	41	79
DH423072	DH443072	7.2	8	41	79
DH423073	DH443073	7.3	8	41	79
DH423074	DH443074	7.4	8	41	79
DH423075	DH443075	7.5	8	41	79
DH423076	DH443076	7.6	8	41	79
DH423077	DH443077	7.7	8	41	79
DH423078	DH443078	7.8	8	41	79
DH423079	DH443079	7.9	8	41	79
DH423080	DH443080	8.0	8	41	79
DH423081	DH443081	8.1	10	47	89
DH423082	DH443082	8.2	10	47	89
DH423083	DH443083	8.3	10	47	89
DH423084	DH443084	8.4	10	47	89
DH423085	DH443085	8.5	10	47	89
DH423086	DH443086	8.6	10	47	89
DH423087	DH443087	8.7	10	47	89
DH423088	DH443088	8.8	10	47	89
DH423089	DH443089	8.9	10	47	89

▶ Other shank types are available on your request.

▶ NEXT PAGE

ISO

Material Description

VDI 3323

HRc

HB

Recommended

P

Non-alloy steel

Low alloy steel

High alloyed steel, and tool steel

M

Stainless steel

K

Grey cast iron

Nodular cast iron

Malleable cast iron

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

13

25

28

32

10

29

32

38

15

35

15

23

10

10

26

3

25

21

125

190

250

270

300

180

275

300

350

200

325

200

240

180

180

260

160

250

130

230

◎

◎

◎

○

◎

◎

○

○

○

◎

○

○

○

○

◎

○

◎

○

◎

○

ISO

Material Description

VDI 3323

HRc

HB

Recommended

N

Aluminum-wrought alloy

Aluminum-cast, alloyed

Copper and Copper Alloys (Bronze /Brass)

Non Metallic Materials

S

Heat Resistant Super Alloys

Titanium Alloys

H

Hardened steel

Chilled Cast Iron

Hardened Cast Iron

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

15

30

25

38

34

55

60

42

55

60

100

75

90

130

110

90

100

200

280

250

350

320

400 Rm

1050 Rm

550

630

400

550

○

◎ : Excellent

○ : Good

TiAIN-COATED SOLID CARBIDE

DREAM DRILLS GENERAL without COOLANT HOLES (3XD)

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation



SHORT
3 × D

EDP No.		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH423090	DH443090	9.0	10	47	89
DH423091	DH443091	9.1	10	47	89
DH423092	DH443092	9.2	10	47	89
DH423093	DH443093	9.3	10	47	89
DH423094	DH443094	9.4	10	47	89
DH423095	DH443095	9.5	10	47	89
DH423096	DH443096	9.6	10	47	89
DH423097	DH443097	9.7	10	47	89
DH423098	DH443098	9.8	10	47	89
DH423099	DH443099	9.9	10	47	89
DH423100	DH443100	10.0	10	47	89
DH423101	DH443101	10.1	12	55	102
DH423102	DH443102	10.2	12	55	102
DH423103	DH443103	10.3	12	55	102
DH423104	DH443104	10.4	12	55	102
DH423105	DH443105	10.5	12	55	102
DH423106	DH443106	10.6	12	55	102
DH423107	DH443107	10.7	12	55	102
DH423108	DH443108	10.8	12	55	102
DH423109	DH443109	10.9	12	55	102
DH423110	DH443110	11.0	12	55	102
DH423111	DH443111	11.1	12	55	102
DH423112	DH443112	11.2	12	55	102
DH423113	DH443113	11.3	12	55	102
DH423114	DH443114	11.4	12	55	102
DH423115	DH443115	11.5	12	55	102
DH423116	DH443116	11.6	12	55	102
DH423117	DH443117	11.7	12	55	102
DH423118	DH443118	11.8	12	55	102
DH423119	DH443119	11.9	12	55	102

EDP No.		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH423120	DH443120	12.0	12	55	102
DH423123	DH443123	12.3	14	60	107
DH423125	DH443125	12.5	14	60	107
DH423128	DH443128	12.8	14	60	107
DH423130	DH443130	13.0	14	60	107
DH423135	DH443135	13.5	14	60	107
DH423138	DH443138	13.8	14	60	107
DH423140	DH443140	14.0	14	60	107
DH423145	DH443145	14.5	16	65	115
DH423148	DH443148	14.8	16	65	115
DH423150	DH443150	15.0	16	65	115
DH423155	DH443155	15.5	16	65	115
DH423158	DH443158	15.8	16	65	115
DH423160	DH443160	16.0	16	65	115
DH423165	DH443165	16.5	18	73	123
DH423168	DH443168	16.8	18	73	123
DH423170	DH443170	17.0	18	73	123
DH423175	DH443175	17.5	18	73	123
DH423178	DH443178	17.8	18	73	123
DH423180	DH443180	18.0	18	73	123
DH423185	DH443185	18.5	20	79	131
DH423190	DH443190	19.0	20	79	131
DH423195	DH443195	19.5	20	79	131
DH423198	DH443198	19.8	20	79	131
DH423200	DH443200	20.0	20	79	131

▶ Other shank types are available on your request.

ISO

Material Description

VDI 3323

HRc

HB

Recommended

P

Non-alloy steel

Low alloy steel

High alloyed steel, and tool steel

M

Stainless steel

K

Grey cast iron

Nodular cast iron

Malleable cast iron

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

ISO

Material Description

VDI 3323

HRc

HB

Recommended

N

Aluminum-wrought alloy

Aluminum-cast, alloyed

Copper and Copper Alloys (Bronze /Brass)

Non Metallic Materials

S

Heat Resistant Super Alloys

Titanium Alloys

H

Hardened steel

Chilled Cast Iron

Hardened Cast Iron

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

15

30

25

38

34

200

280

250

350

320

400 Rm

1050 Rm

550

630

400

550

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎


◎

◎ : Excellent

○ : Good

DH444

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

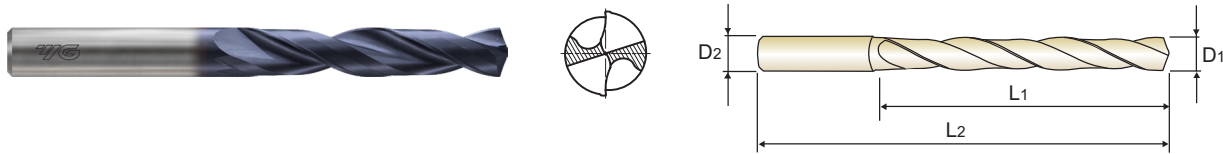

												Unit : mm
EDP No.		Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.		Drill Diameter	Shank Diameter	Flute Length	Overall Length	
Plain	Flat	D1	D2	L1	L2	Plain	Flat	D1	D2	L1	L2	
DH424010	-	1.0	3	8	55	DH424038	DH444038	3.8	6	36	74	
DH424011	-	1.1	3	12	55	DH424039	DH444039	3.9	6	36	74	
DH424012	-	1.2	3	12	55	DH424040	DH444040	4.0	6	36	74	
DH424013	-	1.3	3	12	55	DH424041	DH444041	4.1	6	36	74	
DH424014	-	1.4	3	12	55	DH424042	DH444042	4.2	6	36	74	
DH424015	-	1.5	3	16	55	DH424043	DH444043	4.3	6	36	74	
DH424016	-	1.6	3	16	55	DH424044	DH444044	4.4	6	36	74	
DH424017	-	1.7	3	16	55	DH424045	DH444045	4.5	6	36	74	
DH424018	-	1.8	3	16	55	DH424046	DH444046	4.6	6	36	74	
DH424019	-	1.9	3	16	55	DH424047	DH444047	4.7	6	36	74	
DH424020	-	2.0	4	21	57	DH424048	DH444048	4.8	6	44	82	
DH424021	-	2.1	4	21	57	DH424049	DH444049	4.9	6	44	82	
DH424022	-	2.2	4	21	57	DH424050	DH444050	5.0	6	44	82	
DH424023	-	2.3	4	21	57	DH424051	DH444051	5.1	6	44	82	
DH424024	-	2.4	4	21	57	DH424052	DH444052	5.2	6	44	82	
DH424025	-	2.5	4	21	57	DH424053	DH444053	5.3	6	44	82	
DH424026	-	2.6	4	21	57	DH424054	DH444054	5.4	6	44	82	
DH424027	-	2.7	4	21	57	DH424055	DH444055	5.5	6	44	82	
DH424028	-	2.8	4	21	57	DH424056	DH444056	5.6	6	44	82	
DH424029	-	2.9	4	21	57	DH424057	DH444057	5.7	6	44	82	
DH424030	DH444030	3.0	6	28	66	DH424058	DH444058	5.8	6	44	82	
DH424031	DH444031	3.1	6	28	66	DH424059	DH444059	5.9	6	44	82	
DH424032	DH444032	3.2	6	28	66	DH424060	DH444060	6.0	6	44	82	
DH424033	DH444033	3.3	6	28	66	DH424061	DH444061	6.1	8	53	91	
DH424034	DH444034	3.4	6	28	66	DH424062	DH444062	6.2	8	53	91	
DH424035	DH444035	3.5	6	28	66	DH424063	DH444063	6.3	8	53	91	
DH424036	DH444036	3.6	6	28	66	DH424064	DH444064	6.4	8	53	91	
DH424037	DH444037	3.7	6	28	66	DH424065	DH444065	6.5	8	53	91	

▶ NEXT PAGE


◎ : Excellent ○ : Good

ISO	P										M					K							
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel					Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14		15	16	17	18	19	20		
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10		15	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180		180	260	160	250	130	230		
Recommended		◎	◎	◎	○	◎	◎	○	○	◎	○	○	○	○		◎	○	◎	○	◎	○		
ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled CastIron	Hardened CastIron		
VDI 3323	21	22	23	24	25	26	27	28	29	30		31	32	33	34	35	36	37	38	39	40	41	
HRC												15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100				200	280	250	350	320			400 Rm	1050 Rm	550	630	
Recommended																			○		400	550	

• Phone: +82-32-526-0909, www.yg1.solutions, E-mail: yg1@yg1.solutions

DH444

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

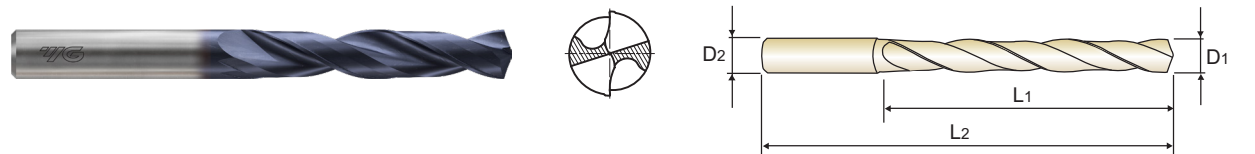

EDP No.		Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2	Plain	Flat	D1	D2	L1	L2
DH424066	DH444066	6.6	8	53	91	DH424094	DH444094	9.4	10	61	103
DH424067	DH444067	6.7	8	53	91	DH424095	DH444095	9.5	10	61	103
DH424068	DH444068	6.8	8	53	91	DH424096	DH444096	9.6	10	61	103
DH424069	DH444069	6.9	8	53	91	DH424097	DH444097	9.7	10	61	103
DH424070	DH444070	7.0	8	53	91	DH424098	DH444098	9.8	10	61	103
DH424071	DH444071	7.1	8	53	91	DH424099	DH444099	9.9	10	61	103
DH424072	DH444072	7.2	8	53	91	DH424100	DH444100	10.0	10	61	103
DH424073	DH444073	7.3	8	53	91	DH424101	DH444101	10.1	12	71	118
DH424074	DH444074	7.4	8	53	91	DH424102	DH444102	10.2	12	71	118
DH424075	DH444075	7.5	8	53	91	DH424103	DH444103	10.3	12	71	118
DH424076	DH444076	7.6	8	53	91	DH424104	DH444104	10.4	12	71	118
DH424077	DH444077	7.7	8	53	91	DH424105	DH444105	10.5	12	71	118
DH424078	DH444078	7.8	8	53	91	DH424106	DH444106	10.6	12	71	118
DH424079	DH444079	7.9	8	53	91	DH424107	DH444107	10.7	12	71	118
DH424080	DH444080	8.0	8	53	91	DH424108	DH444108	10.8	12	71	118
DH424081	DH444081	8.1	10	61	103	DH424109	DH444109	10.9	12	71	118
DH424082	DH444082	8.2	10	61	103	DH424110	DH444110	11.0	12	71	118
DH424083	DH444083	8.3	10	61	103	DH424111	DH444111	11.1	12	71	118
DH424084	DH444084	8.4	10	61	103	DH424112	DH444112	11.2	12	71	118
DH424085	DH444085	8.5	10	61	103	DH424113	DH444113	11.3	12	71	118
DH424086	DH444086	8.6	10	61	103	DH424114	DH444114	11.4	12	71	118
DH424087	DH444087	8.7	10	61	103	DH424115	DH444115	11.5	12	71	118
DH424088	DH444088	8.8	10	61	103	DH424116	DH444116	11.6	12	71	118
DH424089	DH444089	8.9	10	61	103	DH424117	DH444117	11.7	12	71	118
DH424090	DH444090	9.0	10	61	103	DH424118	DH444118	11.8	12	71	118
DH424091	DH444091	9.1	10	61	103	DH424119	DH444119	11.9	12	71	118
DH424092	DH444092	9.2	10	61	103	DH424120	DH444120	12.0	12	71	118
DH424093	DH444093	9.3	10	61	103	DH424125	DH444125	12.5	14	77	124

► NEXT PAGE

ISO		P										M				K					
Material Description	Non-alloy steel					Low alloy steel					High alloy steel, and tool steel	Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14		15	16	17	18	19	20
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10		10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180		180	260	160	250	130	230
Recommended		☉	☉	☉	○	☉	☉	○	○	☉	○	○	○	○		☉	○	☉	○	☉	○

YG YG-1 CO., LTD.

51

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS GENERAL with COOLANT HOLES (3XD)

SERIES
PLAIN SHANK **DH406**
FLAT SHANK **DH446**

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation



EDP No.		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH406086	DH446086	8.6	10	47	89
DH406087	DH446087	8.7	10	47	89
DH406088	DH446088	8.8	10	47	89
DH406089	DH446089	8.9	10	47	89
DH406090	DH446090	9.0	10	47	89
DH406091	DH446091	9.1	10	47	89
DH406092	DH446092	9.2	10	47	89
DH406093	DH446093	9.3	10	47	89
DH406094	DH446094	9.4	10	47	89
DH406095	DH446095	9.5	10	47	89
DH406096	DH446096	9.6	10	47	89
DH406097	DH446097	9.7	10	47	89
DH406098	DH446098	9.8	10	47	89
DH406099	DH446099	9.9	10	47	89
DH406100	DH446100	10.0	10	47	89
DH406101	DH446101	10.1	12	55	102
DH406102	DH446102	10.2	12	55	102
DH406103	DH446103	10.3	12	55	102
DH406104	DH446104	10.4	12	55	102
DH406105	DH446105	10.5	12	55	102
DH406106	DH446106	10.6	12	55	102
DH406107	DH446107	10.7	12	55	102
DH406108	DH446108	10.8	12	55	102
DH406109	DH446109	10.9	12	55	102
DH406110	DH446110	11.0	12	55	102
DH406111	DH446111	11.1	12	55	102
DH406112	DH446112	11.2	12	55	102
DH406113	DH446113	11.3	12	55	102

EDP No.		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH406114	DH446114	11.4	12	55	102
DH406115	DH446115	11.5	12	55	102
DH406116	DH446116	11.6	12	55	102
DH406117	DH446117	11.7	12	55	102
DH406118	DH446118	11.8	12	55	102
DH406119	DH446119	11.9	12	55	102
DH406120	DH446120	12.0	12	55	102
DH406125	DH446125	12.5	14	60	107
DH406130	DH446130	13.0	14	60	107
DH406135	DH446135	13.5	14	60	107
DH406140	DH446140	14.0	14	60	107
DH406145	DH446145	14.5	16	65	115
DH406150	DH446150	15.0	16	65	115
DH406155	DH446155	15.5	16	65	115
DH406160	DH446160	16.0	16	65	115
DH406165	DH446165	16.5	18	73	123
DH406170	DH446170	17.0	18	73	123
DH406175	DH446175	17.5	18	73	123
DH406180	DH446180	18.0	18	73	123
DH406185	DH446185	18.5	20	79	131
DH406190	DH446190	19.0	20	79	131
DH406195	DH446195	19.5	20	79	131
DH406200	DH446200	20.0	20	79	131

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good


ISO	P											M				K							
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommended		◎	◎	◎	○	◎	◎	○	○	◎	○	○	○		◎	○	◎	○	◎	○			

ISO	N										S						H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze /Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled CastIron	Hardened CastIron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRC											15	30	25	38	34			55	60	42
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400
Recommended																		○		

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS GENERAL with COOLANT HOLES (5XD)

SERIES
PLAIN SHANK **DH408**
FLAT SHANK **DH448**

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

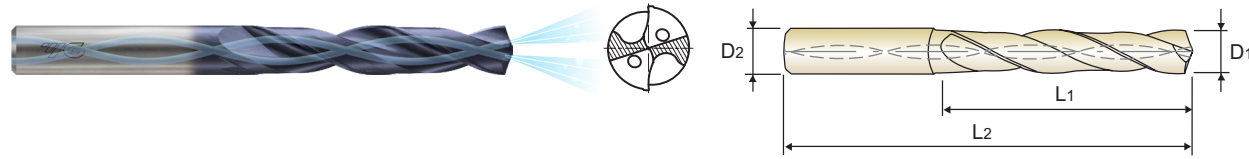

EDP No.		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH408010	-	1.0	3	8	55
DH408011	-	1.1	3	12	55
DH408012	-	1.2	3	12	55
DH408013	-	1.3	3	12	55
DH408014	-	1.4	3	12	55
DH408015	-	1.5	3	16	55
DH408016	-	1.6	3	16	55
DH408017	-	1.7	3	16	55
DH408018	-	1.8	3	16	55
DH408019	-	1.9	3	16	55
DH408020	-	2.0	4	21	57
DH408021	-	2.1	4	21	57
DH408022	-	2.2	4	21	57
DH408023	-	2.3	4	21	57
DH408024	-	2.4	4	21	57
DH408025	-	2.5	4	21	57
DH408026	-	2.6	4	21	57
DH408027	-	2.7	4	21	57
DH408028	-	2.8	4	21	57
DH408029	-	2.9	4	21	57
DH408030	DH448030	3.0	6	28	66
DH408031	DH448031	3.1	6	28	66
DH408032	DH448032	3.2	6	28	66
DH408033	DH448033	3.3	6	28	66
DH408034	DH448034	3.4	6	28	66
DH408035	DH448035	3.5	6	28	66
DH408036	DH448036	3.6	6	28	66
DH408037	DH448037	3.7	6	28	66

EDP No.		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH408038	DH448038	3.8	6	36	74
DH408039	DH448039	3.9	6	36	74
DH408040	DH448040	4.0	6	36	74
DH408041	DH448041	4.1	6	36	74
DH408042	DH448042	4.2	6	36	74
DH408043	DH448043	4.3	6	36	74
DH408044	DH448044	4.4	6	36	74
DH408045	DH448045	4.5	6	36	74
DH408046	DH448046	4.6	6	36	74
DH408047	DH448047	4.7	6	36	74
DH408048	DH448048	4.8	6	44	82
DH408049	DH448049	4.9	6	44	82
DH408050	DH448050	5.0	6	44	82
DH408051	DH448051	5.1	6	44	82
DH408052	DH448052	5.2	6	44	82
DH408053	DH448053	5.3	6	44	82
DH408054	DH448054	5.4	6	44	82
DH408055	DH448055	5.5	6	44	82
DH408056	DH448056	5.6	6	44	82
DH408057	DH448057	5.7	6	44	82
DH408058	DH448058	5.8	6	44	82
DH408059	DH448059	5.9	6	44	82
DH408060	DH448060	6.0	6	44	82
DH408061	DH448061	6.1	8	53	91
DH408062	DH448062	6.2	8	53	91
DH408063	DH448063	6.3	8	53	91
DH408064	DH448064	6.4	8	53	91
DH408065	DH448065	6.5	8	53	91

▶ Other shank types are available on your request.

▶ NEXT PAGE

ISO

Material Description

VDI 3323

HRC

HB

Recommended

P

Non-alloy steel

Low alloy steel

High alloyed steel, and tool steel

Stainless steel

Grey cast iron

Nodular cast iron

Malleable cast iron

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

13

25

28

32

10

29

32

38

15

35

15

23

10

10

26

3

25

19

21

125

190

250

270

300

180

275

300

350

200

325

200

240

180

180

260

160

250

130

230

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

ISO

Material Description

VDI 3323

HRC

HB

Recommended

N

Aluminum-wrought alloy

Aluminum-cast, alloyed

Copper and Copper Alloys (Bronze /Brass)

Non Metallic Materials

Heat Resistant Super Alloys

Titanium Alloys

Hardened steel

Chilled CastIron

Hardened CastIron

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

15

30

25

38

34

200

280

250

350

320

400 Rm

1050 Rm

550

630

400

550

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎

◎ : Excellent ○ : Good

TiAIN-COATED SOLID CARBIDE

DREAM DRILLS GENERAL with COOLANT HOLES (5XD)

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

PLAIN SHANK **DH408**
FLAT SHANK **DH448**



LONG
5× D

EDP No.		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH408066	DH448066	6.6	8	53	91
DH408067	DH448067	6.7	8	53	91
DH408068	DH448068	6.8	8	53	91
DH408069	DH448069	6.9	8	53	91
DH408070	DH448070	7.0	8	53	91
DH408071	DH448071	7.1	8	53	91
DH408072	DH448072	7.2	8	53	91
DH408073	DH448073	7.3	8	53	91
DH408074	DH448074	7.4	8	53	91
DH408075	DH448075	7.5	8	53	91
DH408076	DH448076	7.6	8	53	91
DH408077	DH448077	7.7	8	53	91
DH408078	DH448078	7.8	8	53	91
DH408079	DH448079	7.9	8	53	91
DH408080	DH448080	8.0	8	53	91
DH408081	DH448081	8.1	10	61	103
DH408082	DH448082	8.2	10	61	103
DH408083	DH448083	8.3	10	61	103
DH408084	DH448084	8.4	10	61	103
DH408085	DH448085	8.5	10	61	103
DH408086	DH448086	8.6	10	61	103
DH408087	DH448087	8.7	10	61	103
DH408088	DH448088	8.8	10	61	103
DH408089	DH448089	8.9	10	61	103
DH408090	DH448090	9.0	10	61	103
DH408091	DH448091	9.1	10	61	103
DH408092	DH448092	9.2	10	61	103
DH408093	DH448093	9.3	10	61	103

EDP No.		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH408094	DH448094	9.4	10	61	103
DH408095	DH448095	9.5	10	61	103
DH408096	DH448096	9.6	10	61	103
DH408097	DH448097	9.7	10	61	103
DH408098	DH448098	9.8	10	61	103
DH408099	DH448099	9.9	10	61	103
DH408100	DH448100	10.0	10	61	103
DH408101	DH448101	10.1	12	71	118
DH408102	DH448102	10.2	12	71	118
DH408103	DH448103	10.3	12	71	118
DH408104	DH448104	10.4	12	71	118
DH408105	DH448105	10.5	12	71	118
DH408106	DH448106	10.6	12	71	118
DH408107	DH448107	10.7	12	71	118
DH408108	DH448108	10.8	12	71	118
DH408109	DH448109	10.9	12	71	118
DH408110	DH448110	11.0	12	71	118
DH408111	DH448111	11.1	12	71	118
DH408112	DH448112	11.2	12	71	118
DH408113	DH448113	11.3	12	71	118
DH408114	DH448114	11.4	12	71	118
DH408115	DH448115	11.5	12	71	118
DH408116	DH448116	11.6	12	71	118
DH408117	DH448117	11.7	12	71	118
DH408118	DH448118	11.8	12	71	118
DH408119	DH448119	11.9	12	71	118
DH408120	DH448120	12.0	12	71	118
DH408125	DH448125	12.5	14	77	124

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P											M				K							
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommended		◎	◎	◎	○	◎	◎	○	○	◎	○	○	○	○	◎	○	◎	○	◎	○			

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze /Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled CastIron	Hardened CastIron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																		○			

TiAIN-COATED SOLID CARBIDE

DREAM DRILLS GENERAL with COOLANT HOLES (5XD)

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

PLAIN SHANK **DH408**
FLAT SHANK **DH448**



LONG
5× D

EDP No.		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH408130	DH448130	13.0	14	77	124
DH408135	DH448135	13.5	14	77	124
DH408140	DH448140	14.0	14	77	124
DH408145	DH448145	14.5	16	83	133
DH408150	DH448150	15.0	16	83	133
DH408155	DH448155	15.5	16	83	133
DH408160	DH448160	16.0	16	83	133
DH408165	DH448165	16.5	18	93	143

EDP No.		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH408170	DH448170	17.0	18	93	143
DH408175	DH448175	17.5	18	93	143
DH408180	DH448180	18.0	18	93	143
DH408185	DH448185	18.5	20	101	153
DH408190	DH448190	19.0	20	101	153
DH408195	DH448195	19.5	20	101	153
DH408200	DH448200	20.0	20	101	153

▶ Other shank types are available on your request.

ISO

Material Description

VDI 3323

HRC

HB

Recommended

Non-alloy steel

Low alloy steel

High alloyed steel, and tool steel

Stainless steel

Grey cast iron

Nodular cast iron

Malleable cast iron

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

13

25

28

32

38

10

29

32

38

15

35

15

23

10

10

26

3

25

19

21

125

190

250

270

300

180

275

300

350

200

325

200

240

180

180

260

160

250

130

230

◎

◎

◎

○

◎

◎

○

○

◎

○

○

○

○

○

◎

○

◎

○

◎

○

ISO

Material Description

VDI 3323

HRC

HB

Recommended

N

S

H

Aluminum-wrought alloy

Aluminum-cast, alloyed

Copper and Copper Alloys (Bronze /Brass)

Non Metallic Materials

Heat Resistant Super Alloys

Titanium Alloys

Hardened steel

Chilled CastIron

Hardened CastIron

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

15

30

25

38

34

55

60

42

55

60

100

75

90

130

110

90

100

200

280

250

350

320

400 Rm

1050 Rm

550

630

400

550

○

◎ : Excellent

○ : Good


TiAIN-COATED SOLID CARBIDE

DREAM DRILLS GENERAL with COOLANT HOLES (8XD)

SERIES

DH421

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

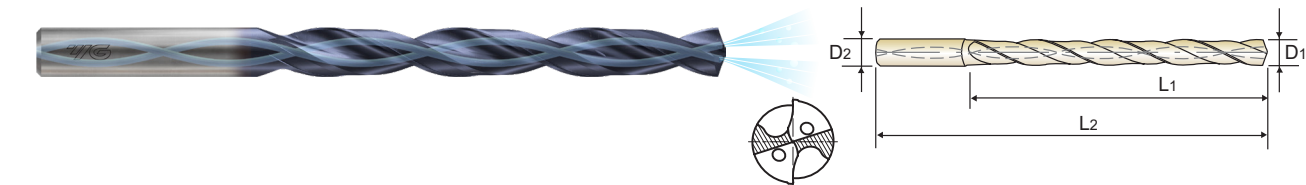

EXTRA LONG

8× D

Unit : mm									
EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2	TiAIN	D1	D2	L1	L2
DH421030	3.0	6	34	72	DH421058	5.8	6	57	95
DH421031	3.1	6	34	72	DH421059	5.9	6	57	95
DH421032	3.2	6	34	72	DH421060	6.0	6	57	95
DH421033	3.3	6	34	72	DH421061	6.1	8	76	114
DH421034	3.4	6	34	72	DH421062	6.2	8	76	114
DH421035	3.5	6	34	72	DH421063	6.3	8	76	114
DH421036	3.6	6	34	72	DH421064	6.4	8	76	114
DH421037	3.7	6	34	72	DH421065	6.5	8	76	114
DH421038	3.8	6	43	81	DH421066	6.6	8	76	114
DH421039	3.9	6	43	81	DH421067	6.7	8	76	114
DH421040	4.0	6	43	81	DH421068	6.8	8	76	114
DH421041	4.1	6	43	81	DH421069	6.9	8	76	114
DH421042	4.2	6	43	81	DH421070	7.0	8	76	114
DH421043	4.3	6	43	81	DH421071	7.1	8	76	114
DH421044	4.4	6	43	81	DH421072	7.2	8	76	114
DH421045	4.5	6	43	81	DH421073	7.3	8	76	114
DH421046	4.6	6	43	81	DH421074	7.4	8	76	114
DH421047	4.7	6	43	81	DH421075	7.5	8	76	114
DH421048	4.8	6	57	95	DH421076	7.6	8	76	114
DH421049	4.9	6	57	95	DH421077	7.7	8	76	114
DH421050	5.0	6	57	95	DH421078	7.8	8	76	114
DH421051	5.1	6	57	95	DH421079	7.9	8	76	114
DH421052	5.2	6	57	95	DH421080	8.0	8	76	114
DH421053	5.3	6	57	95	DH421081	8.1	10	95	142
DH421054	5.4	6	57	95	DH421082	8.2	10	95	142
DH421055	5.5	6	57	95	DH421083	8.3	10	95	142
DH421056	5.6	6	57	95	DH421084	8.4	10	95	142
DH421057	5.7	6	57	95	DH421085	8.5	10	95	142

▶ Other shank types are available on your request.

▶ NEXT PAGE

		P										M					K				
Material Description		Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
VDI 3323		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21
HB		125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended		◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
		N										S					H				
Material Description		Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Heat Resistant Super Alloys				
VDI 3323		21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc																					
HB		60	100	75	90	130	110	90	100								400 Rm	1050 Rm	550	630	400
Recommended																					


TiAIN-COATED SOLID CARBIDE

DREAM DRILLS GENERAL with COOLANT HOLES (8XD)

SERIES

DH421

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

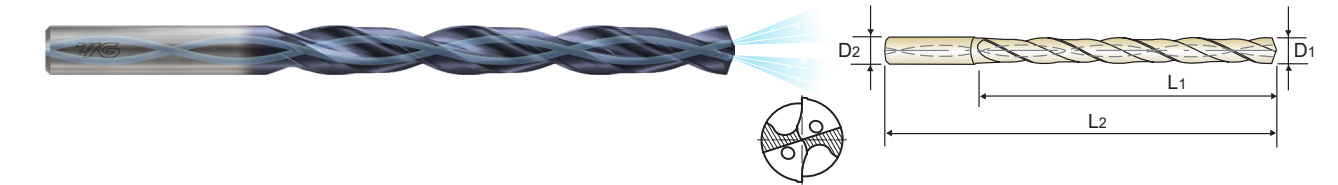

EXTRA LONG

8× D

Unit : mm									
EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2	TiAIN	D1	D2	L1	L2
DH421086	8.6	10	95	142	DH421114	11.4	12	114	162
DH421087	8.7	10	95	142	DH421115	11.5	12	114	162
DH421088	8.8	10	95	142	DH421116	11.6	12	114	162
DH421089	8.9	10	95	142	DH421117	11.7	12	114	162
DH421090	9.0	10	95	142	DH421118	11.8	12	114	162
DH421091	9.1	10	95	142	DH421119	11.9	12	114	162
DH421092	9.2	10	95	142	DH421120	12.0	12	114	162
DH421093	9.3	10	95	142	DH421125	12.5	14	133	178
DH421094	9.4	10	95	142	DH421130	13.0	14	133	178
DH421095	9.5	10	95	142	DH421135	13.5	14	133	178
DH421096	9.6	10	95	142	DH421140	14.0	14	133	178
DH421097	9.7	10	95	142					
DH421098	9.8	10	95	142					
DH421099	9.9	10	95	142					
DH421100	10.0	10	95	142					
DH421101	10.1	12	114	162					
DH421102	10.2	12	114	162					
DH421103	10.3	12	114	162					
DH421104	10.4	12	114	162					
DH421105	10.5	12	114	162					
DH421106	10.6	12	114	162					
DH421107	10.7	12	114	162					
DH421108	10.8	12	114	162					
DH421109	10.9	12	114	162					
DH421110	11.0	12	114	162					
DH421111	11.1	12	114	162					
DH421112	11.2	12	114	162					
DH421113	11.3	12	114	162					

▶ Other shank types are available on your request.

		P										M					K				
Material Description		Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
VDI 3323		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21
HB		125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended		◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
		N										S					H				
Material Description		Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Heat Resistant Super Alloys				
VDI 3323		21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc																					
HB		60	100	75	90	130	110	90	100								400 Rm	1050 Rm	550	630	400
Recommended																					



RECOMMENDED CUTTING CONDITIONS

DH404, DH423, DH443, DH424, DH444 SERIES

without COOLANT HOLES

Vc = m/min.
RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc	Parameter	Drill Diameter (mm)		Vc	Parameter	Drill Diameter (mm)			
					1.0	2.0			3.0	4.0	5.0	6.0
P	2	Non-alloy steel	70	RPM	22280	11140	100	RPM	10610	7960	6370	5310
	3		70	FEED	0.03-0.05	0.05-0.07	100	FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22
	4		70	RPM	22280	11140	100	RPM	10610	7960	6370	5310
	5		70	FEED	0.03-0.05	0.05-0.07	100	FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22
	6	Low alloy steel	60	RPM	19100	9550	80	RPM	10610	7960	6370	5310
	7		60	FEED	0.03-0.05	0.05-0.07	80	FEED	0.04-0.10	0.07-0.13	0.10-0.16	0.12-0.18
	8		60	RPM	19100	9550	80	RPM	8490	6370	5090	4240
	9		60	FEED	0.03-0.05	0.05-0.07	80	FEED	0.04-0.10	0.07-0.13	0.10-0.16	0.12-0.18
	10	High alloyed steel, and tool steel	30	RPM	19100	9550	40	RPM	8490	6370	5090	4240
	11		30	FEED	0.02-0.04	0.03-0.05	40	FEED	0.03-0.08	0.05-0.11	0.08-0.14	0.10-0.16
M	12	Stainless steel	50	RPM	15920	7960	70	RPM	7430	5570	4460	3710
	13		50	FEED	0.03-0.05	0.05-0.07	70	FEED	0.04-0.10	0.07-0.13	0.10-0.16	0.12-0.18
K	15	Grey cast iron	70	RPM	22280	11140	100	RPM	10610	7960	6370	5310
	16		70	FEED	0.04-0.06	0.04-0.06	100	FEED	0.08-0.14	0.12-0.18	0.15-0.22	0.20-0.26
	17	Nodular cast iron	65	RPM	20690	10350	80	RPM	8490	6370	5090	4240
	18		65	FEED	0.04-0.06	0.04-0.06	80	FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22
	19	Malleable cast iron	70	RPM	22280	11140	100	RPM	10610	7960	6370	5310
	20		70	FEED	0.04-0.06	0.04-0.06	100	FEED	0.08-0.14	0.12-0.18	0.15-0.22	0.20-0.26
H	38	Hardened steel	20	RPM	15920	7960	70	RPM	7430	5570	4460	3710
			20	FEED	0.03-0.05	0.05-0.07	70	FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22

ISO	VDI 3323	Material Description	Vc	Parameter	Drill Diameter (mm)					
					8.0	10.0	12.0	14.0	16.0	20.0
P	2	Non-alloy steel	100	RPM	3980	3180	2650	2270	1990	1590
	3		100	FEED	0.18-0.24	0.19-0.27	0.21-0.29	0.23-0.31	0.25-0.33	0.30-0.40
	4		100	RPM	3980	3180	2650	2270	1990	1590
	5		100	FEED	0.18-0.24	0.19-0.27	0.21-0.29	0.23-0.31	0.25-0.33	0.30-0.40
	6	Low alloy steel	80	RPM	3980	3180	2650	2270	1990	1590
	7		80	FEED	0.14-0.20	0.15-0.23	0.17-0.25	0.18-0.26	0.19-0.27	0.20-0.30
	8		80	RPM	3180	2550	2120	1820	1590	1270
	9		80	FEED	0.14-0.20	0.15-0.23	0.17-0.25	0.18-0.26	0.19-0.27	0.20-0.30
	10	High alloyed steel, and tool steel	40	RPM	1590	1270	1060	910	800	640
	11		40	FEED	0.12-0.18	0.13-0.19	0.14-0.20	0.15-0.21	0.16-0.22	0.18-0.28
M	12	Stainless steel	70	RPM	2790	2230	1860	1590	1390	1110
	13		45	FEED	0.18-0.24	0.19-0.27	0.21-0.29	0.23-0.31	0.25-0.33	0.30-0.40
K	15	Grey cast iron	100	RPM	1790	1430	1190	1020	900	720
	16		80	FEED	0.14-0.20	0.15-0.23	0.17-0.25	0.18-0.26	0.19-0.27	0.20-0.30
	17	Nodular cast iron	100	RPM	3980	3180	2650	2270	1990	1590
	18		70	FEED	0.22-0.28	0.25-0.33	0.27-0.35	0.29-0.37	0.31-0.39	0.34-0.44
	19	Malleable cast iron	80	RPM	3180	2550	2120	1820	1590	1270
	20		70	FEED	0.18-0.24	0.19-0.27	0.21-0.29	0.23-0.31	0.25-0.33	0.30-0.40
H	38	Hardened steel	25	RPM	2790	2230	1860	1590	1390	1110
			25	FEED	0.18-0.24	0.19-0.27	0.21-0.29	0.23-0.31	0.25-0.33	0.30-0.40

► Recommend to reduce the feed rate as following **Feed 100%** : DH404(3×D), DH423(3×D), DH424(5×D)

RECOMMENDED CUTTING CONDITIONS

DH406, DH446, DH408, DH448, DH421 SERIES

with COOLANT HOLES

Vc = m/min.
RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc	Parameter	Drill Diameter (mm)		Vc	Parameter	Drill Diameter (mm)			
					1.0	2.0			3.0	4.0	5.0	6.0
P	2	Non-alloy steel	80	RPM	25460	12730	110	RPM	11670	8750	7000	5840
	3		80	FEED	0.03-0.05	0.05-0.07	110	FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22
	4		80	RPM	25460	12730	110	RPM	11670	8750	7000	5840
	5		80	FEED	0.03-0.05	0.05-0.07	110	FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22
	6	Low alloy steel	70	RPM	22280	11140	90	RPM	11670	8750	7000	5840
	7		70	FEED	0.03-0.05	0.05-0.07	90	FEED	0.04-0.10	0.07-0.13	0.10-0.16	0.12-0.18
	8		70	RPM	22280	11140	90	RPM	9550	7160	5730	4770
	9		70	FEED	0.03-0.05	0.05-0.07	90	FEED	0.04-0.10	0.07-0.13	0.10-0.16	0.12-0.18
	10	High alloyed steel, and tool steel	60	RPM	22280	11140	80	RPM	11670	8750	7000	5840
	11		60	FEED	0.02-0.04	0.03-0.05	80	FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22
M	12	Stainless steel	60	RPM	19100	9550	80	RPM	9550	7160	5730	4770
	13		45	FEED	0.03-0.05	0.05-0.07	55	FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22
K	15	Grey cast iron	80	RPM	14320	7160	110	RPM	5840	4380	3500	2920
	16		75	FEED	0.02-0.04	0.03-0.05	95	FEED	0.04-0.10	0.07-0.13	0.10-0.16	0.12-0.18
	17	Nodular cast iron	90	RPM	23870	11940	120	RPM	11670	8750	7000	5840
	18		60	FEED	0.04-0.06	0.04-0.06	80	FEED	0.08-0.14	0.12-0.18	0.15-0.22	0.20-0.26
	19	Malleable cast iron	70	RPM	28650	14320	90	RPM	10080	7560	6050	5040
	20		60	FEED	0.04-0.06	0.04-0.06	80	FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22
H	38	Hardened steel	25	RPM	19100	9550	30	RPM	12730	9550	7640	6370
			25	FEED	0.04-0.06	0.04-0.06	80	FEED	0.08-0.14	0.12-0.18	0.15-0.22	0.20-0.26

ISO	VDI 3323	Material Description	Vc	Parameter	Drill Diameter (mm)					
					8.0	10.0	12.0	14.0	16.0	20.0
P	2	Non-alloy steel	110	RPM	4380	3500	2920	2500	2190	1750
	3		110	FEED	0.18-0.24	0.19-0.27	0.21-0.29	0.23-0.31	0.25-0.33	0.30-0.40
	4		110	RPM	4380	3500	2920	2500	2190	1750
	5		110	FEED	0.18-0.24	0.19-0.27	0.21-0.29	0.23-0.31	0.25-0.33	0.30-0.40
	6	Low alloy steel	90	RPM	4380	3500	2920	2500	2190	1750
	7		90	FEED	0.14-0.20	0.15-0.23	0.17-0.25	0.18-0.26	0.19-0.27	0.20-0.30
	8		90	RPM	3580	2860	2390	2050	1790	1430
	9		90	FEED	0.14-0.20	0.15-0.23	0.17-0.25	0.18-0.26	0.19-0.27	0.20-0.30
	10	High alloyed steel, and tool steel	50	RPM	4380	3500	2920	2500	2190	1750
	11		45	FEED	0.18-0.24	0.19-0.27	0.21-0.29	0.23-0.31	0.25-0.33	0.30-0.40
M	12	Stainless steel	80	RPM	3580	2860	2390	2050	1790	1430
	13		55	FEED	0.18-0.24	0.19-0.27	0.21-0.29	0.23-0.31	0.25-0.33	0.30-0.40
K	15	Grey cast iron	110	RPM	1990	1590	1330	1140	990	880
	16		95	FEED	0.12-0.18	0.13-0.19	0.14-0.20	0.15-0.21	0.16-0.22	0.17-0.25
	17	Nodular cast iron	120	RPM	3180	2550	2120	1820	1590	1270
	18		80	FEED	0.14-0.20	0.15-0.23	0.17-0.25	0.18-0.26	0.19-0.27	0.20-0.30
	19	Malleable cast iron	90	RPM	3180	2550	2120	1820	1590	1270
	20		80	FEED	0.18-0.24	0.19-0.27	0.21-0.29	0.23-0.31	0.25-0.33	0.30-0.40
H	38	Hardened steel	30	RPM	1790	1430	1190	1020	900	720
			30	FEED	0.12-0.18	0.13-0.19	0.14-0.20	0.15-0.21	0.16-0.22	0.18-0.28

► Recommend to reduce the feed rate as following **Feed 100%** : DH406(3×D), DH408(5×D) **Feed 75%** : DH421(8×D)

DREAM DRILLS GENERAL