




# SPADE DRILLS

**Z\*\*EXHMT** SERIES

**Z\*\*EXSMT** SERIES

## TAPER SHANK HOLDERS

-  HALTER MIT MORSEKEGEL
-  Porte-plaquette à queue cône morse
-  PUNTE CON ATTACCO CM

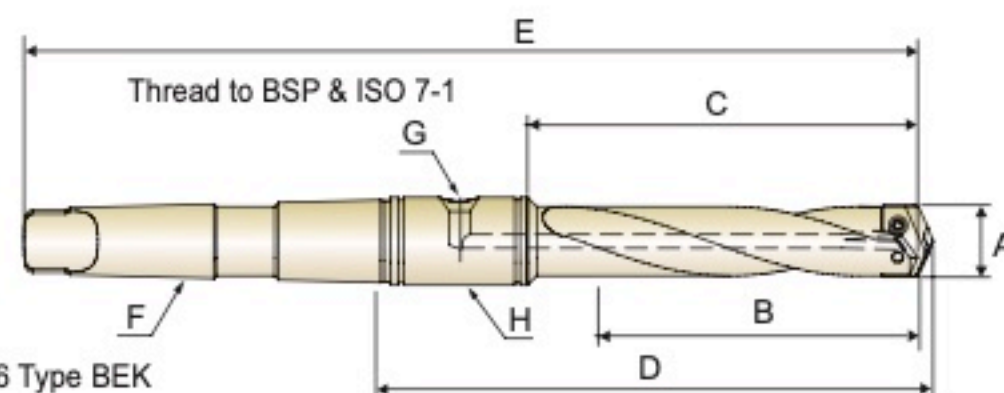

Per ISO 296 Type BEK

## EXTENDED LENGTH - Helical Flute (Metric)

| Series | EDP No.     | Drill Insert Range | Max. Drill Depth | Body Length | Ref. Length | Overall Length | MT | Pipe Tap | RCA      |
|--------|-------------|--------------------|------------------|-------------|-------------|----------------|----|----------|----------|
|        |             | A                  | B                | C           | D           | E              | F  | G        | H        |
| Y      | ZY0EXHMT02M | 9.5 ~ 11.0         | 111.1            | 130.9       | 167.4       | 239.7          | #2 | 1/16     | PR120190 |
| Z      | ZZ0EXHMT02M | 11.5 ~ 12.5        | 111.1            | 130.9       | 167.4       | 239.7          | #2 | 1/16     | PR120190 |
| 0      | Z00EXHMT02M | 13.0 ~ 17.5        | 114.3            | 135.0       | 171.8       | 243.7          | #2 | 1/16     | PR120190 |
| 0.5    | Z05EXHMT02M | 15.5 ~ 17.5        | 114.3            | 135.0       | 171.8       | 243.7          | #2 | 1/16     | PR120190 |
| 1      | Z10EXHMT03M | 18.0 ~ 24.0        | 273.1            | 301.6       | 345.7       | 435.8          | #3 | 1/8      | PR120254 |
| 1.5    | Z15EXHMT03M | 22.0 ~ 24.0        | 273.1            | 301.6       | 345.7       | 435.8          | #3 | 1/8      | PR120254 |
| 2      | Z20EXHMT04M | 25.0 ~ 35.0        | 289.0            | 317.5       | 363.6       | 477.0          | #4 | 1/8      | PR120254 |
| 2.5    | Z25EXHMT04M | 30.0 ~ 35.0        | 289.0            | 317.5       | 370.8       | 484.2          | #4 | 1/4      | PR120317 |

► You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 374)