

# DIGITAL CALIPERS

DATA  
OUTPUT




1106-501

With data interface

(data output cable code 7315-22, 7302-22, optional, for calipers with c=24mm or 31mm)

| Code      | Range           | Accuracy | a    | c    | d     | e    | L      |
|-----------|-----------------|----------|------|------|-------|------|--------|
| 1106-301  | 0-300mm/0-12"   | ±0.05mm  | 18mm | 24mm | 100mm | 20mm | 420mm  |
| 1106-302  | 0-300mm/0-12"   | ±0.05mm  | 18mm | 24mm | 150mm | 20mm | 420mm  |
| 1106-451  | 0-450mm/0-18"   | ±0.05mm  | 18mm | 24mm | 100mm | 20mm | 625mm  |
| 1106-501  | 0-500mm/0-20"   | ±0.05mm  | 18mm | 24mm | 100mm | 20mm | 675mm  |
| 1106-502  | 0-500mm/0-20"   | ±0.06mm  | 18mm | 24mm | 150mm | 20mm | 675mm  |
| 1106-503  | 0-500mm/0-20"   | ±0.06mm  | 24mm | 31mm | 200mm | 20mm | 675mm  |
| 1106-505  | 0-500mm/0-20"   | ±0.08mm  | 24mm | 42mm | 300mm | 20mm | 675mm  |
| 1106-601  | 0-600mm/0-24"   | ±0.05mm  | 18mm | 24mm | 100mm | 20mm | 770mm  |
| 1106-602  | 0-600mm/0-24"   | ±0.06mm  | 18mm | 24mm | 150mm | 20mm | 770mm  |
| 1106-603  | 0-600mm/0-24"   | ±0.06mm  | 24mm | 31mm | 200mm | 20mm | 770mm  |
| 1106-802  | 0-800mm/0-32"   | ±0.07mm  | 24mm | 31mm | 150mm | 20mm | 1025mm |
| 1106-1002 | 0-1000mm/0-40"  | ±0.08mm  | 24mm | 31mm | 150mm | 20mm | 1220mm |
| 1106-1003 | 0-1000mm/0-40"  | ±0.08mm  | 24mm | 31mm | 200mm | 20mm | 1220mm |
| 1106-1005 | 0-1000mm/0-40"  | ±0.10mm  | 24mm | 42mm | 300mm | 20mm | 1220mm |
| 1106-1502 | 0-1500mm/0-60"  | ±0.11mm  | 24mm | 42mm | 150mm | 20mm | 1780mm |
| 1106-1503 | 0-1500mm/0-60"  | ±0.12mm  | 24mm | 42mm | 200mm | 20mm | 1780mm |
| 1106-2002 | 0-2000mm/0-80"  | ±0.14mm  | 24mm | 42mm | 150mm | 20mm | 2290mm |
| 1106-2003 | 0-2000mm/0-80"  | ±0.14mm  | 24mm | 42mm | 200mm | 20mm | 2290mm |
| 1106-2502 | 0-2500mm/0-100" | ±0.22mm  | 24mm | 42mm | 150mm | 20mm | 2800mm |
| 1106-3002 | 0-3000mm/0-120" | ±0.26mm  | 24mm | 42mm | 150mm | 20mm | 3300mm |

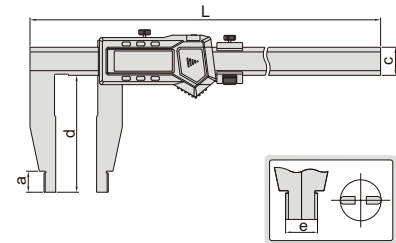

- Resolution: 0.01mm/0.0005"
- Button function: on/off, zero, mm/inch, ABS, data preset
- Battery CR2032
- Made of stainless steel

Built-in wireless (receiver code 7315-2/3/6/7/8 is required)

| Code       | Range         | Accuracy | a    | c    | d     | e    | L     |
|------------|---------------|----------|------|------|-------|------|-------|
| 1106-301WL | 0-300mm/0-12" | ±0.05mm  | 18mm | 24mm | 100mm | 20mm | 420mm |
| 1106-302WL | 0-300mm/0-12" | ±0.05mm  | 18mm | 24mm | 150mm | 20mm | 420mm |
| 1106-451WL | 0-450mm/0-18" | ±0.05mm  | 18mm | 24mm | 100mm | 20mm | 625mm |
| 1106-501WL | 0-500mm/0-20" | ±0.05mm  | 18mm | 24mm | 100mm | 20mm | 675mm |
| 1106-502WL | 0-500mm/0-20" | ±0.06mm  | 18mm | 24mm | 150mm | 20mm | 675mm |
| 1106-601WL | 0-600mm/0-24" | ±0.05mm  | 18mm | 24mm | 100mm | 20mm | 770mm |
| 1106-602WL | 0-600mm/0-24" | ±0.06mm  | 18mm | 24mm | 150mm | 20mm | 770mm |