

WATERPROOF DIGITAL OUTSIDE MICROMETERS (WITHOUT DATA OUTPUT)

- Resolution 0.001mm/0.00005"
- IP65 dust/waterproof
- Button function: on/off, set, mm/inch, ABS/INC
- No data output
- Automatic power off
- Carbide measuring faces
- Supplied with spherical anvil
- Setting standards are included (except 0-25mm/0-1")




IP65
WATERPROOF

**ATTENTION: NO
DATA OUTPUT**

**INSPECTION
CERTIFICATE**
TRACEABLE TO DKD



3108-25A

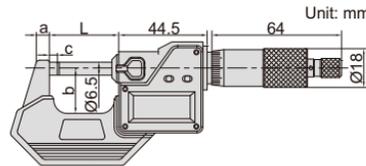

Ratchet stop type

(mm)

| Code | Range | Accuracy | L | a | b | c |
|------------|----------------|----------|-------|----|------|-----|
| 3108-25A* | 0-25mm/0-1" | ±2µm | 34.5 | 6 | 25 | 3 |
| 3108-50A* | 25-50mm/1-2" | ±2µm | 59.5 | 8 | 32 | 3 |
| 3108-75A* | 50-75mm/2-3" | ±3µm | 84.5 | 8 | 44.5 | 3 |
| 3108-100A* | 75-100mm/3-4" | ±3µm | 109.5 | 8 | 57 | 3 |
| 3108-125A | 100-125mm/4-5" | ±3µm | 135 | 10 | 70 | 3 |
| 3108-150A | 125-150mm/5-6" | ±3µm | 160.5 | 10 | 82 | 3 |
| 3108-175A | 150-175mm/6-7" | ±4µm | 186 | 12 | 94.5 | 5.5 |
| 3108-200A | 175-200mm/7-8" | ±4µm | 211.5 | 12 | 107 | 5.5 |

Friction thimble type

(mm)

| Code | Range | Accuracy | L | a | b | c |
|------------|-------------|----------|------|---|----|---|
| 3108-25FA* | 0-25mm/0-1" | ±2µm | 34.5 | 6 | 25 | 3 |

Set

| Code | Range | Micrometers included | Packaging |
|-------------|--------------|---|-----------------|
| 3108-753A* | 0-75mm/0-3" | 3108-25A, 3108-50A, 3108-75A | blow mould case |
| 3108-1004A* | 0-100mm/0-4" | 3108-25A, 3108-50A, 3108-75A, 3108-100A | blow mould case |
| 3108-1506A | 0-150mm/0-6" | 3108-25A, 3108-50A, 3108-75A, 3108-100A, 3108-125A, 3108-150A | aluminum box |



3108-753A

3108-1506A

*Supplied with manufacturer inspection certificate traceable to DKD Germany