


Square Drill Inserts (SPMX)

Recommended Cutting Conditions : p.223

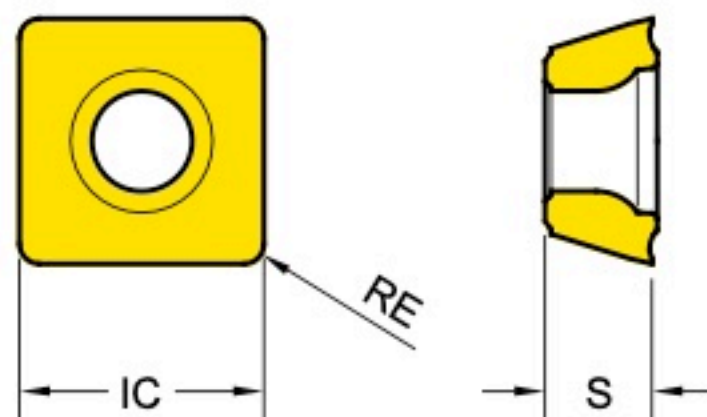

Series	IC	S
SPMX 0502	5.00	2.38
SPMX 0602	6.00	2.41
SPMX 07T3	7.94	3.97
SPMX 0904	9.80	4.30
SPMX 1104	11.50	4.80
SPMX 1405	14.30	5.20

EDP 3200..

SPMX	Designation	RE (mm)	Fn (mm/rev.)	P25	P20	P40
				M25	M20	M40
				K30	K20	M40
				YG602	YG713	YG613
SPMX General 	SPMX 050204	0.4	0.07~0.14	● 0005	● 0062	● 0077
	SPMX 060204	0.4	0.08~0.14	● 0006	● 0063	● 0078
	SPMX 07T308	0.8	0.08~0.16	● 0007	● 0064	● 0061
	SPMX 090408	0.8	0.08~0.16	● 0008	● 0065	● 0079
	SPMX 110408	0.8	0.10~0.18	● 0009	● 0066	● 0080
	SPMX 140512	1.2	0.10~0.20	● 0010	● 0067	
-ST Stainless Steel 	SPMX 050204 - ST	0.4	0.03~0.10	● 0011		● 0070
	SPMX 060204 - ST	0.4	0.04~0.11	● 0012		● 0071
	SPMX 07T308 - ST	0.8	0.04~0.11	● 0013		● 0068
	SPMX 090408 - ST	0.8	0.05~0.12	● 0014		● 0072
	SPMX 110408 - ST	0.8	0.05~0.12			● 0073
	SPMX 140512 - ST	1.2	0.05~0.16			● 0074