



MORSE TAPER SHANK DRILLS

D1209 SERIES

HSS, MORSE TAPER SHANK TWIST DRILLS


EXTRA LONG

- HSS, SPIRALBOHRER mit MORSEKEGELSCHAFT
- Forets HSS, queue cône morse, série extra-longue
- PUNTE ELICOIDALI IN HSS, ATTACCO CM

ÜBERLANG
EXTRA-LONGUE
EXTRA LUNGA

► **Surface treatment** : Steam Tempered(Black Oxide Finish)
 ► **Application** : Drilling deep holes in steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron, graphite.

► **Oberflächenbehandlung** : Steam Homo(Schwarzoxidation)
 ► **Verwendung** : Für Bohrungen mit Bohrbuchsen oder an tief liegenden Stellen.
 Zum Bohren von Stahl und Stahlguß, Grauß, Temperguß, Sphäroguß, Sinterisen, Neusilber und Graphit

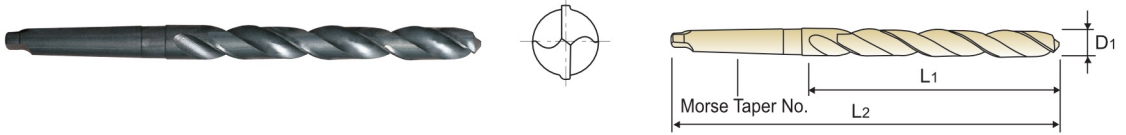

DIN 1870/1 HSS N ≈ 30° 1~4 h8 118° Vap p.A277

PlainShank Recommended ToolHolder MORSETAPERBOR

Unit : mm

EDP No.	Drill Diameter	Flute Length	Overall Length	Morse Taper No.
	D1	L1	L2	
D1209130	13.0	205	310	1
D1209135	13.5	220	325	1
D1209140	14.0	220	325	1
D1209145	14.5	220	340	2
D1209150	15.0	220	340	2
D1209155	15.5	230	355	2
D1209160	16.0	230	355	2
D1209165	16.5	230	355	2
D1209170	17.0	230	355	2
D1209175	17.5	245	370	2
D1209180	18.0	245	370	2
D1209185	18.5	245	370	2
D1209190	19.0	245	370	2
D1209195	19.5	260	385	2
D1209200	20.0	260	385	2
D1209205	20.5	260	385	2
D1209210	21.0	260	385	2
D1209215	21.5	270	405	2
D1209220	22.0	270	405	2
D1209225	22.5	270	405	2
D1209230	23.0	270	405	2
D1209235	23.5	270	425	3
D1209240	24.0	290	440	3
D1209245	24.5	290	440	3
D1209250	25.0	290	440	3
D1209255	25.5	290	440	3
D1209260	26.0	290	440	3
D1209265	26.5	290	440	3

EDP No.	Drill Diameter	Flute Length	Overall Length	Morse Taper No.
	D1	L1	L2	
D1209270	27.0	305	460	3
D1209275	27.5	305	460	3
D1209280	28.0	305	460	3
D1209285	28.5	305	460	3
D1209290	29.0	305	460	3
D1209295	29.5	305	460	3
D1209300	30.0	305	460	3
D1209305	30.5	320	480	3
D1209310	31.0	320	480	3
D1209320	32.0	320	505	4
D1209330	33.0	320	505	4
D1209340	34.0	340	530	4
D1209350	35.0	340	530	4
D1209360	36.0	340	530	4
D1209370	37.0	340	530	4
D1209380	38.0	360	555	4
D1209390	39.0	360	555	4
D1209400	40.0	360	555	4
D1209410	41.0	360	555	4
D1209420	42.0	360	555	4
D1209430	43.0	385	585	4
D1209440	44.0	385	585	4
D1209450	45.0	385	585	4
D1209460	46.0	385	585	4
D1209470	47.0	385	585	4
D1209480	48.0	405	605	4
D1209490	49.0	405	605	4
D1209500	50.0	405	605	4

◎ : Excellent

ISO	P									M				K							
Material Description	Non-alloy steel				Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	35	15	35	15	23	10	10	26	3	25			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	○	◎	○	○	○	○	○	◎	○	○	○	○	○	○	○	○	○	
ISO	N				S					H											
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○						○							○					