




- Clockwise and counter-clockwise operation
- Unit: N.m, in.lb, ft.lb, kg.cm
- Peak and track working modes
- Target torque value can be set, with audible and visible alarm:
  - Green LED light on and buzzer sounds when target torque value is 90%~100% of target torque
  - Red LED light on and buzzer sounds when target torque value is reached
- Power off automatically in 5 minutes without any operations
- Non-slip grip handle
- With overload record (once the torque reaches 110% of the maximum range)

## SMALL RANGE DIGITAL TORQUE WRENCH

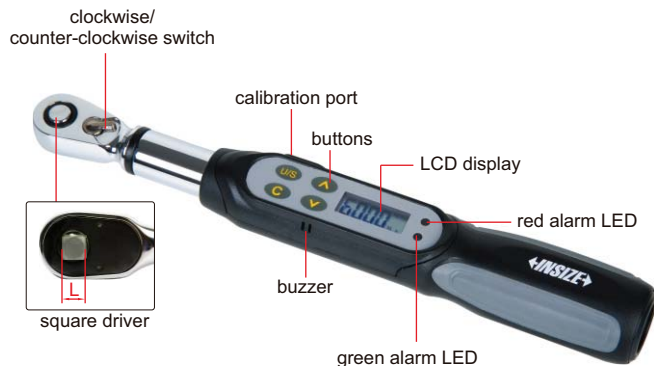

**IST-WP6**

### SPECIFICATION

|                   |                   |               |
|-------------------|-------------------|---------------|
| Code              |                   | IST-WP6       |
| Range             |                   | 1.2~6N.m      |
| Accuracy          | clockwise         | ±3%           |
|                   | counter-clockwise | ±4%           |
| Resolution        |                   | 0.001N.m      |
| Square driver (L) |                   | 1/4"          |
| Power supply      |                   | 1×AAA battery |
| Length            |                   | 260mm         |
| Weight            |                   | 430g          |

### OPTIONAL ACCESSORY

Calibration cable

IST-SD-CABLE