
ATTENTION: NOT SUITABLE FOR 0.001MM DIAL INDICATORS

BUILT-IN WIRELESS DIGITAL INDICATOR IS OPTIONAL

BORE GAUGES FOR BLIND HOLES





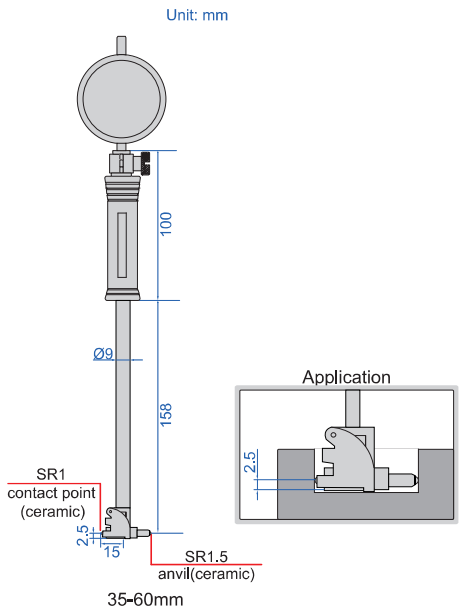



2420-60 **2220-60** **2220-60WP**

- To measure diameter of shallow and blind holes
- Optional accessory: setting ring (code **6312**), long handle (code **7351**), bore gauge setter

With dial indicator

Code	Range	Indicator	Accuracy	Repeatability
2420-60	35-60mm	dial indicator,range 10mm, graduation 0.01mm(code **2308-10FA**)	±0.018mm	0.003mm


With digital indicator
(optional wireless transmitter code 7315-51B, receiver is needed page 9)

Code	Range	Indicator	Accuracy	Repeatability
2220-60	35-60mm	digital indicator,code **2108-10F**, range 12.7mm/0.5", resolution 0.002mm/0.0001" (can switch to 0.01mm/0.0005")	±0.018mm	0.003mm

With waterproof digital indicator
(optional wireless transmitter code 7315-51B, receiver is needed page 9)

Code	Range	Indicator	Accuracy	Repeatability
2220-60WP	35-60mm	waterproof digital indicator, code **2137-10F**, range 12.7mm/0.5", dust/waterproof IP54, resolution 0.002mm/0.0001" (can switch to 0.01mm/0.0005")	±0.018mm	0.003mm

with digital indicator

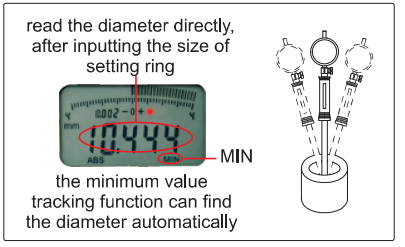

with waterproof digital indicator

