


# END MILL HOLDER EMH

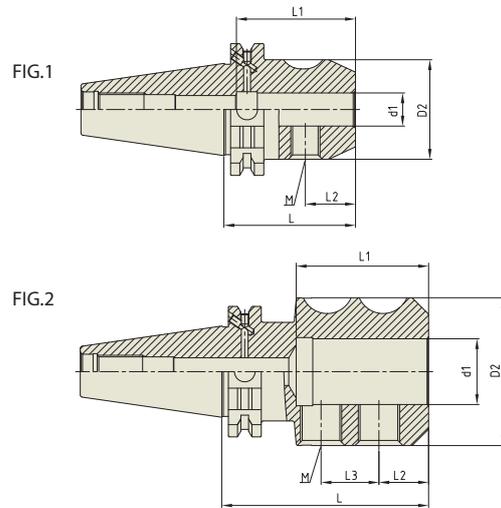

Unit : mm

| TAPER No. | MODEL No.          | EDP No.  | d1 | D2 | L   | L1 | L2   | L3 | M   | FIG. | WEIGHT (Kg) |
|-----------|--------------------|----------|----|----|-----|----|------|----|-----|------|-------------|
| 40        | SK40AD/B-EMH6-50   | P2531009 | 6  | 25 | 50  | 35 | 18   | -  | M6  | 1    | 0.86        |
|           | SK40AD/B-EMH8-50   | P2531010 | 8  | 28 | 50  | 35 | 18   | -  | M8  | 1    | 0.89        |
|           | SK40AD/B-EMH10-50  | P2531011 | 10 | 35 | 50  | 39 | 20   | -  | M10 | 1    | 0.95        |
|           | SK40AD/B-EMH12-50  | P2531012 | 12 | 42 | 50  | 46 | 22.5 | -  | M12 | 1    | 1.03        |
|           | SK40AD/B-EMH16-63  | P2531013 | 16 | 48 | 63  | 57 | 24   | -  | M14 | 1    | 1.28        |
|           | SK40AD/B-EMH20-63  | P2531014 | 20 | 52 | 63  | 54 | 25   | -  | M16 | 1    | 1.28        |
|           | SK40AD/B-EMH25-100 | P2531015 | 25 | 65 | 100 | 60 | 24   | 25 | M18 | 2    | 2.28        |
|           | SK40AD/B-EMH32-100 | P2531016 | 32 | 72 | 100 | 64 | 24   | 28 | M20 | 2    | 2.50        |
| 50        | SK50AD/B-EMH10-63  | P2531019 | 10 | 35 | 63  | 39 | 20   | -  | M10 | 1    | 2.90        |
|           | SK50AD/B-EMH12-63  | P2531020 | 12 | 42 | 63  | 44 | 22.5 | -  | M12 | 1    | 2.90        |
|           | SK50AD/B-EMH16-63  | P2531021 | 16 | 48 | 63  | 47 | 24   | -  | M14 | 1    | 3.00        |
|           | SK50AD/B-EMH20-63  | P2531022 | 20 | 52 | 63  | 51 | 25   | -  | M16 | 1    | 3.05        |
|           | SK50AD/B-EMH25-80  | P2531023 | 25 | 65 | 80  | 60 | 24   | 25 | M18 | 2    | 3.73        |
|           | SK50AD/B-EMH32-100 | P2531024 | 32 | 72 | 100 | 64 | 24   | 28 | M20 | 2    | 4.53        |
|           | SK50AD/B-EMH40-100 | P2531025 | 40 | 80 | 100 | 74 | 30   | 32 | M20 | 2    | 4.77        |

- ▶ Standard End Mill Holder is for a cutting tool with Weldon shank and End Mill Holder for a cutting tool with Whistle notch shank is available upon request.
- ▶ Combi-style holder with ball jointed clamping screw which can be used with cutting tools with weldon and Whistle notch shank is available.