

INFRARED THERMOMETER (HIGH TEMPERATURE TYPE) CODE 0218-B610



DATA
OUTPUT

- Unit: °C/°F
- MAX/MIN/AVG/DIF mode
- Trigger lock continuous measurement function
- Adjustable emissivity: 0.10~1.00
- 100 data storage
- High and low alarm
- Automatic data hold
- Low battery display
- Automatic power off
- Computer software is included



tripod (included)

computer software (included): connect to software via USB cable to collect, display and store data

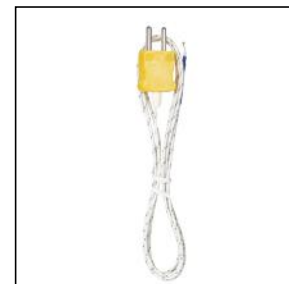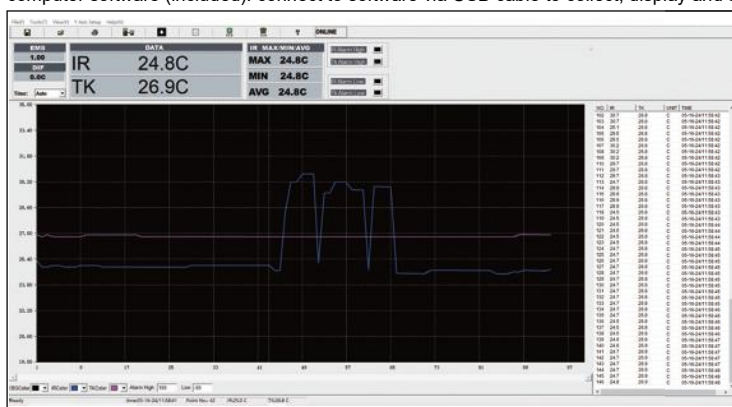

K-type thermocouple (included)

SPECIFICATION

Infrared system	temperature range	-50°C~1850°C/-58°F~3362°F
	temperature accuracy	±(2%· t +3.0°C) (at -50°C~20°C); ±(1%·t+1.0°C) (at 20°C~500°C); ±1.5% (at 500°C~1000°C); ±2.0% (at 1000°C~1850°C)
	temperature resolution	0.1°C/°F (<1000°C/°F), 1°C/°F (≥1000°C/°F)
	distance to spot size (D:S)	50:1
	emissivity	0.10~1.00 (adjustable)
	repeatability	±1.5°C (at -50°C~20°C) ±0.5% or ±0.5°C (at 20°C~1850°C)
	response time	150ms
	spectral response	8~14μm
diode laser	output<1mW, wavelength 630nm~670nm class 2 laser product	
K-Type thermocouple system (electrical signal)	temperature range	-50°C~1370°C/-58°F~2498°F
	temperature accuracy	±(1.5%· t +3°C) (at -50°C~1000°C) ±(1.5%·t+2°C) (at 1000°C~1370°C)
	temperature resolution	0.1°C/°F (<1000°C/°F), 1°C/°F (≥1000°C/°F)
	repeatability	±1.5%
Power supply	1×9V battery	
Operation environment	temperature: 0°C~50°C humidity: 10%RH~90%RH (non-condensing)	
Storage environment	temperature: -10°C~60°C humidity: <80%RH (non-condensing)	
Dimension	204×155×52mm	
Weight	315g	

STANDARD DELIVERY

Main unit	1 pc
9V battery	1 pc
USB cable	1 pc
K-type thermocouple	1 pc
Tripod	1 pc

SPECIFICATION OF K-TYPE THERMOCOUPLE

Temperature range	-40°C~250°C
Temperature accuracy	±2.5°C
Length	1m