



Multi-Clamp type for CN** Insert




: p. 30

Unit:mm

Series	Designation	EDP 2700.. R L	DMIN	DCON	H	WF	LF	Insert
 ..- MCLNR/L Approach angle 95°	S20R - MCLNR/L12	0857 0858	25	20	18.3	13	200	CN1204
	S32T - MCLNR/L12	0861 0862	40	32	30	22	300	


Series	Designation	Information	Clamp	Clamp Screw	Shim	Shim Pin	Allen Key
..MC..	..20..12	Description	YAMK-07	YAKV-04-M5x17	-	YAPM-12	YAAL-03-3
		EDP	28000019	18000082	-	28000025	18000061
	..32..12	Description	YAMK-03	-	YAACN-3-0001	YAPM-04	-
		EDP	28000020	-	18000137	18000113	-

Multi-Clamp type for DN** Insert

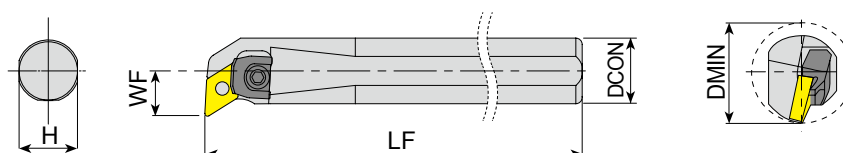

: p. 35

Unit:mm

Series	Designation	EDP 2700.. R L	DMIN	DCON	H	WF	LF	Insert
 ..- MDUNR/L Approach angle 95°	S32T - MDUNR/L15	0928 0929	40	32	30	22	300	DN1506
		0930 0931	50	40	37.5	27	350	
		0932 0933	63	50	47	35	400	

Series	Designation	Information	Clamp	Clamp Screw	Upper Ring	Lower Ring	Shim	Shim Pin	Allen Key
..MD..	..15	Description	YAMK-04	YAKV-30-M6x22	YABPL-01	YAS-01	YAADN-3-0001	YAPM-04	YAAL-03-3
		EDP	18000072	18000091	18000058	18000052	18000142	18000113	18000061

Internal Turning Holder Code


*Metric

1	2	3	4	5	6	7	8	9	10
A	32	S	P	W	L	N	R	12	(C)
Coolant & Material	Shank Diameter (DCON)	Legth (LF)	Clamping System	Insert Shape (1st Letter of Insert)	Tool Style	Insert Clearance (2nd Letter of Insert)	Tool Hand	Insert Size	(Optional Clamp)

1 - Coolant and Tool Material

Symbol	Internal Coolant	Tool Material
A	O	Steel
S	X	
E	O	Carbide
C	X	Carbide

2 - Shank Diameter (DCON)

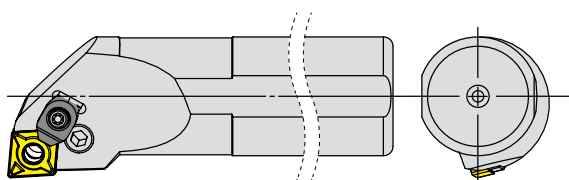

3 - Length (LF)

Symbol	Length (mm)	Symbol	Length (mm)
E	70	Q	180
F	80	R	200
H	100	S	250
K	125	T	300
M	150	U	350
P	170	V	400

4 - Clamping System

Symbol	System
C	Top Clamp (No Clamping Hole Insert)
M	Multi lock (Straight Clamping Hole Insert)
P	Lever Lock (Straight Clamping Hole Insert)
S	Screw Clamp (Screw Clamping Hole Insert)
T (D, A)	Double Clamp (Straight Clamping Hole Insert)

Turning - Name Code System

Internal Turning Holder Code

*Metric

1	2	3	4	5	6	7	8	9
A	25	R	S	C	L	C	R	09
Coolant & Material	Shank Diameter (DCON)	Length (LF)	Clamping System	Insert Shape (1st Letter of Insert)	Tool Style	Insert Clearance (2nd Letter of Insert)	Tool Hand	Insert Size

6 - Tool Style

Approach Angle (KAPR)	Side Direction	EndDirection
	Offset Shank	
75°		K
91°		F
93°	J	U
95°	L (Both Direction)	
107.5°		Q

8 - Hand Direction

Symbol	Hand Direction
R	Right Hand
L	Left Hand

9 - Insert Size *

Examples	is Compatible with...
PCLNR 2525M 12	CNMG 1204**
SCLCR 2020K 09	CCMT 09T3**
TWLNR 2525M 08	WNMG 0804**

* Related to Insert Designation to check compatibility

5, 7 - Insert Compatibility *



* Related to Insert Designation to check compatibility

* Refer to '1-Shape' of page 20

(10 - Optional Clamp)

Symbol	Optional Clamp
C	Included