

## ELECTRONIC ANALYTICAL BALANCES (BASIC TYPE)

### DATA OUTPUT

- Downward-mounted electromagnetic sensor
- All aluminum alloy base, wind shield, three side glass sliding doors
- Weighing, simple counting, taring
- LCD display, with backlight
- Data output
- Unit: g, ct, oz, ozt
- With a hook at the bottom



printer (optional)



class F1 calibration weight (included)





8311-220

### SPECIFICATION

| Code                      | 8311-60                | 8311-120 | 8311-220 |
|---------------------------|------------------------|----------|----------|
| Maximum weighing          | 60g                    | 120g     | 220g     |
| Minimum weighing          | 10mg                   | 10mg     | 10mg     |
| Resolution (d)            | 0.1mg                  | 0.1mg    | 0.1mg    |
| Verification interval (e) | 1mg                    | 1mg      | 1mg      |
| Repeatability             | ±0.5mg                 |          |          |
| Linearity                 | ±0.5mg                 |          |          |
| Stabilization time        | 2.5s                   |          |          |
| Output                    | RS232                  |          |          |
| Weighing pan size (Ød)    | Ø80mm                  |          |          |
| Operation temperature     | 10~30°C                |          |          |
| Operation humidity        | 20~85%RH               |          |          |
| Power supply              | power adapter (12V/1A) |          |          |
| Dimension (L×W×H)         | 345×215×342mm          |          |          |

Unit: mm

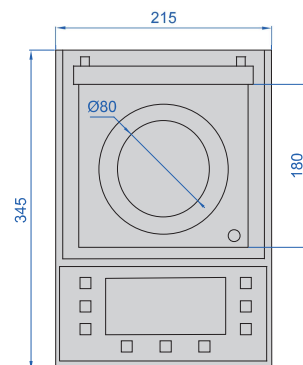

### OPTIONAL ACCESSORY

|                                           |              |
|-------------------------------------------|--------------|
| RS232 cable                               | 8311-CABLE   |
| Printer                                   | 8311-PRINTER |
| Wireless transmitter (receiver is needed) | 7315-8311    |

### STANDARD DELIVERY

|                    |      |
|--------------------|------|
| Main unit          | 1 pc |
| Calibration weight | 1 pc |