

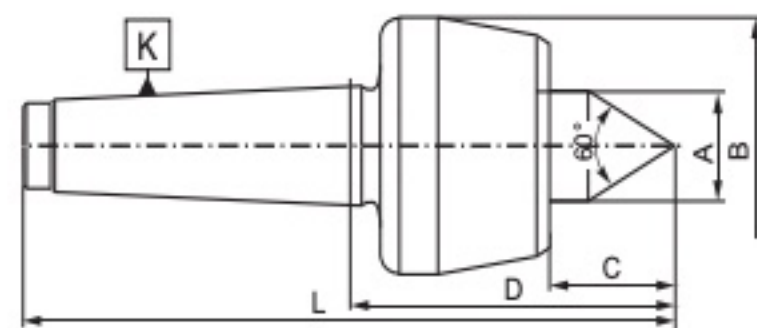


8811 R

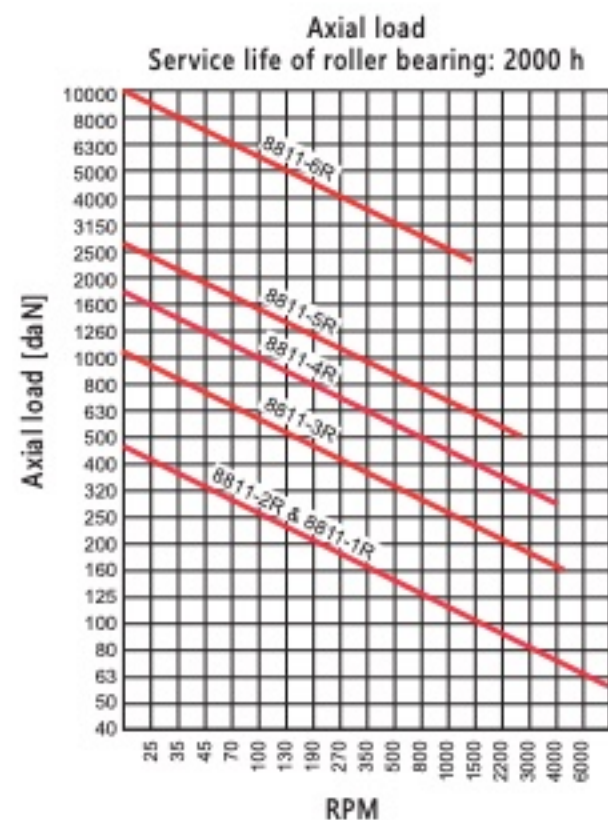

Revolving centers with 60° point

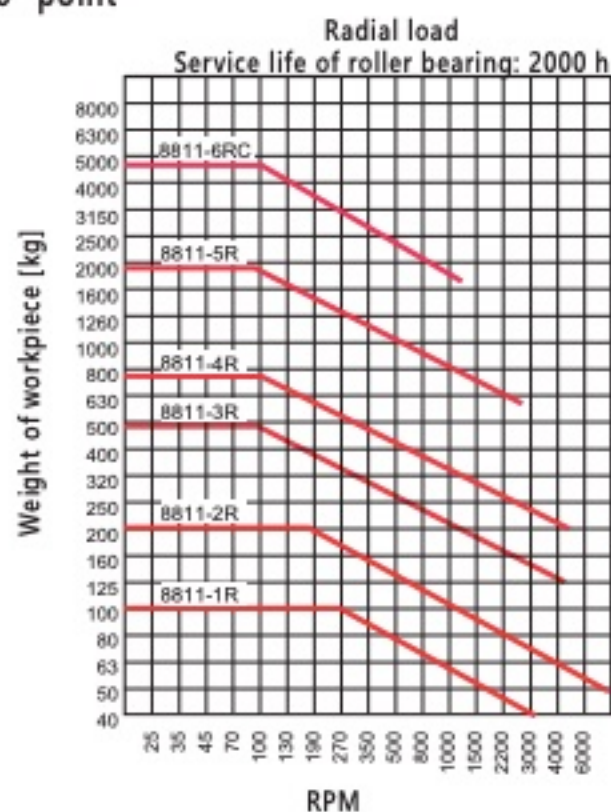

*Slim body design **Heavy duty

K MT	Max. weight [lbs]	RPM	Max. concentr. err.	Code No.	Max. concentr. err.	Code No.	A [in]	B [in]	C [in]	D [in]	L [in]
			[in] Precision		[in] Standard						
1	220	7,000	-	-	0.0002	7-568-001	0.59	1.42	0.67	2.38	4.49
2	440	7,000	0.0001	7-568-102	0.0002	7-568-002	0.79	1.77	0.93	2.54	5.06
3RL*	880	6,300	0.0001	7-568-103L	0.0002	7-568-003L	0.87	1.97	1.08	2.76	5.94
3	1,100	5,000	0.0001	7-568-103	0.0002	7-568-003	0.98	2.36	1.20	3.11	6.30
4	1,760	3,800	0.0001	7-568-104	0.0002	7-568-004	1.26	2.76	1.57	4.00	8.03
5	4,400	3,000	0.0001	7-568-105	0.0002	7-568-005	1.57	3.54	1.95	5.04	10.14
6	7,700	2,600	-	-	0.0004	7-568-006	1.97	4.13	2.26	5.98	13.15
6RC**	11,000	1,500	-	-	0.0004	7-568-006C	2.46	5.51	2.64	7.64	14.80