


HYDRAULIC CHUCK (Power E Hydro)

HCP

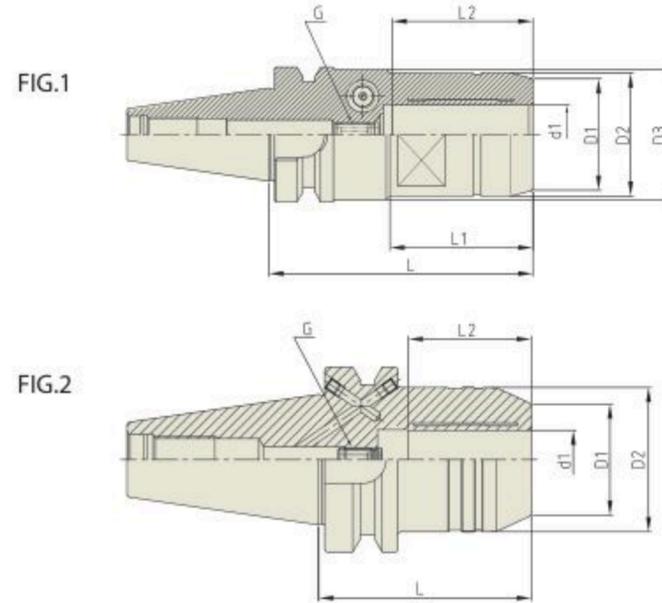

TAPER No.	MODEL No.	EDP No.	d1	D1	D2	D3	L	L1	L2	G	FIG.	WEIGHT (Kg)
30	BT30-HC20P-90	P2776602P	20	38	42	44.5	90	48.75	48	M8x1.0	1	0.90
40	BT40AD/B-HC12P-58	P2776601P	12	32	42	-	58	-	41	M8x1.0	2	1.10
	BT40AD/B-HC20P-72.5	P2554001P	20	39.25	49.25	-	72.5	-	48	M8x1.0	2	1.40
50	BT50AD/B-HC20P-83.5	P2755010P	20	39.25	49.25	-	83.5	-	48	M8x1.0	2	3.90
	BT50AD/B-HC32P-90	P2558001P	32	58.5	72	-	90	-	57	M8x1.0	2	4.60

- ▶ For applicable hydraulic chuck collet, please refer to page 80-82.
- ▶ Balancing grade G2.5 at 25,000 RPM or U max < 1 gmm.
- ▶ Supplied with clamping T-wrench.

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/MAS 403)

HSK
(DIN 69893/ISO 12164)

STRAIGHT TYPE & SET

ACCESSORY & PARTS