

CARBIDE, 1 FLUTE


🇩🇪 **VOLLHARTMETALL, 1 SCHNEIDEN**

🇫🇷 **Fraise carbure, 1 dent**

🇮🇹 **1 TAGLIENTE**

- Designed for non-ferrous material, non-metal like aluminum and acrylic
- 1 Flute allows excellent finished workpiece and chip evacuation

- Entwickelt für NE-Metalle und nichtmetallische Werkstoffe wie Aluminium und Acryl
- 1 Spannute ermöglicht hervorragende Werkstückoberflächen und Spanabfuhr

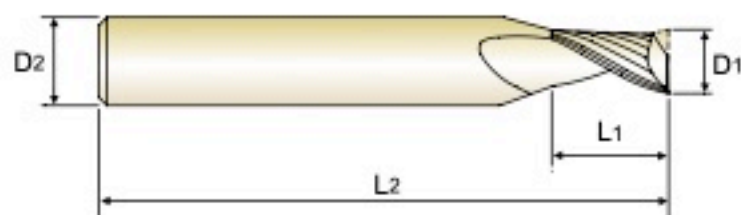

	Flat Shank	Page	Plain Shank	Page
Recommended ToolHolder	END MILL HOLDER	D118 - 137	HYDRAULIC CHUCK	D15 - 46
			SHRINK FIT HOLDER	D47 - 72
			POWER MILLING CHUCK	D161 - 176
			ER COLLET CHUCK	D73 - 116

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
	D1	D2	L1	L2	
E5E47020	2.0	3	8	50	0.04
E5E47030	3.0	3	12	50	0.05
E5E47040	4.0	4	15	60	0.07
E5E47050	5.0	5	17	60	0.09
E5E47060	6.0	6	20	65	0.10
E5E47080	8.0	8	22	65	0.14
E5E47100	10.0	10	25	75	0.14
E5E47120	12.0	12	30	80	0.14

► TiN, TiCN and TiAlN Coatings are available on your request.

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5



Enforced Cutting Edge