

Middle Pitch Permanent Magnetic Chuck

600 GAUSS **SIDE MAGNETIC FORCE 19KGF**

PLATE CENTER 28 KGF

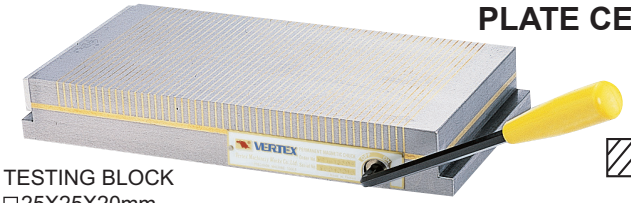

TESTING BLOCK
□25X25X20mm
BLOCK (TUNGSTEN)

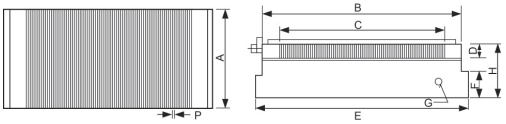



(2+6)
Suit for work piece thickness≥3mm length≥25mm
Mag. force : 600 GS



Good for workpiece bigger in lenght & width

APPLICATION

New type of think chuck, in 50mm thickness, for grinding and electrodischarging works, for thin plate or small works, in wide range of applications, it features a wide effective magnetic area on the chucking face.


FEATURES

- Thin and light to meet versatile applications.
- Fine-pitched magnetic poles, on this model, make it ideally suitable for small and thin works.
- Hexagonal wrench key is used for the magnetic ON/OFF change over handle it is inserted through the side easily removed and operates quite lightly.
- The chuck surface has a wider effective mgnetic area than other chucks of similar type.

B TYPE



BS TYPE



Unit:mm

ORDER NO.	DIMENSION	CHUCKING SIZE				POLE PITCH	CHUCK MOUNTING FACE			HEIGHT	HEXAGONAL HANDLE HOLE	WEIGHT KGS	CODE NO.
		A	B	C	D	P	A	E	F	H	G	N.W.	
VGF-1018B	100X175	100	175	146	18	5(1+4)	100	195	15	50	8	7	2015-160
VGF-1515B	150X150	150	150	116	18	5(1+4)	150	175	15	50	8	9	2015-161
VGF-1530B	150X300	150	300	256	18	5(1+4)	150	320	15	50	8	18	2015-162
VGF-1535B	150X350	150	350	306	18	5(1+4)	150	370	15	50	8	21	2015-163
VGF-1540B	150X400	150	400	356	18	5(1+4)	150	420	15	50	8	24	2015-164A
VGF-1545B	150X450	150	450	406	18	5(1+4)	150	470	15	50	8	26	2015-164
VGF-2040B	200X400	200	400	356	18	5(1+4)	200	420	15	50	8	31	2015-165
VGF-2045B	200X450	200	450	406	18	5(1+4)	200	470	15	50	8	36	2015-166
VGF-1018BS	100X175	100	175	146	18	5(1+4)	100	175	15	50	8	7	2015-167
VGF-1515BS	150X150	150	150	121	18	5(1+4)	150	150	15	50	8	9	2015-168
VGF-1530BS	150X300	150	300	256	18	5(1+4)	150	300	15	50	8	18	2015-169