


DIN 6316

Clamp, cranked

Tempering steel, varnished.

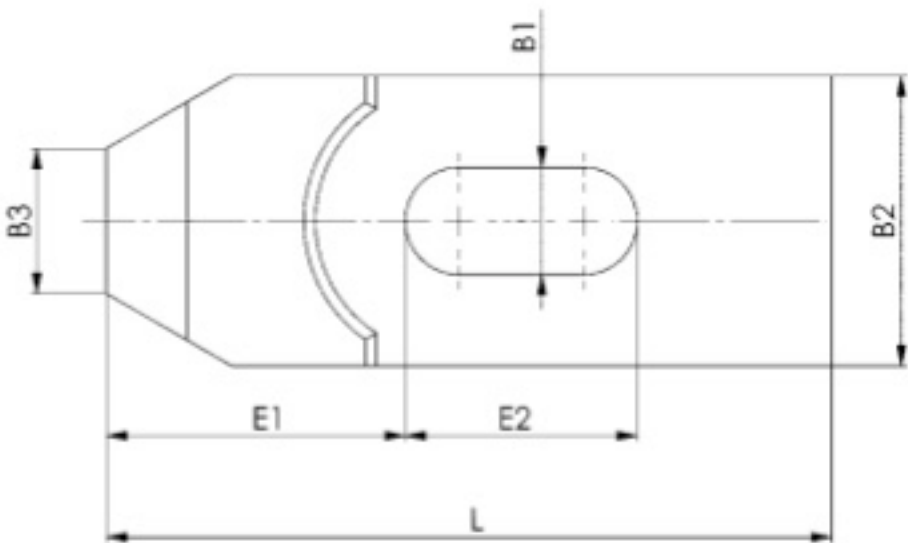

Order no.	B1	L	for clamping screw metric	for clamping screw inch	A	B2	B3	C	E1	E2	H	Weight [g]
71027	6,6	60	M6	1/4	10	20	10	8	20	20	9	81
71035	9	80	M8	5/16	12	25	12	9	25	25	11	166
71043	11	100	M10	3/8	15	30	15	12	32	32	14	299
71050	14	125	M12 M14	1/2	20	40	20	16	40	40	18	678
71068	18 *	125	M16 M18	5/8	25	50	25	20	49	40	23	1049
71076	18	160	M16 M18	5/8	25	50	25	20	49	50	23	1366
71084	22 *	160	M20 M22	3/4	30	60	30	24	55	55	27	1911
71092	22	200	M20 M22	3/4	30	60	30	24	55	70	27	2417
71100	26 *	200	M24	1	35	70	35	25	72	60	32	3315
71118	26	250	M24	1	35	70	35	25	72	80	32	4132
71126	33 *	250	M30	1 1/4	40	80	40	40	91	80	45	5225
71134	33	315	M30	1 1/4	50	80	40	40	91	100	45	8459
71159	43 *	400	M36 M42	1 1/2 1 5/8	60	100	50	50	105	120	55	17078

* Size not included in DIN, dimensions similar to DIN

Recommendations



DIN 787,
page 90



DIN 508,
page 100



DIN 6331,
page 104



CAD