

# DIGITAL V-ANVIL MICROMETERS


**IP65**  
WATERPROOF

**DATA**  
OUTPUT



**3590-153A**

- Measure the diameter of parts or cutting tools with odd grooves, such as taps, reamers and end mills
- Resolution 0.001mm/0.00005"
- IP65 dust/waterproof
- Button function: on/off, set, mm/inch, ABS/INC
- Data output
- Automatic power off
- Ratchet stop
- Carbide measuring faces
- Supplied with setting standards
- Optional accessory: data output cable (code **7315-30**, **7302-30**)

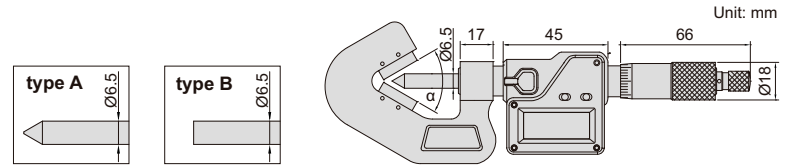

Code	Range	Flutes	Accuracy	α	Type
<b>3590-153A</b>	1-15mm/0.04-0.6"	3	±4μm	60°	A
<b>3590-203A</b>	5-20mm/0.2-0.8"	3	±4μm	60°	B
<b>3590-353A</b>	20-35mm/0.8-1.4"	3	±5μm	60°	B
<b>3590-503A</b>	35-50mm/1.4-2.0"	3	±5μm	60°	B
<b>3590-653A</b>	50-65mm/2.0-2.6"	3	±6μm	60°	B
<b>3590-803A</b>	65-80mm/2.6-3.2"	3	±6μm	60°	B
<b>3590-953A</b>	80-95mm/3.2-3.6"	3	±6μm	60°	B
<b>3590-255A</b>	5-25mm/0.2-1.0"	5	±4μm	108°	B

Code	Range	Flutes	Accuracy	α	Type
<b>3590-455A</b>	25-45mm/1.0-1.8"	5	±5μm	108°	B
<b>3590-655A</b>	45-65mm/1.8-2.6"	5	±6μm	108°	B
<b>3590-855A</b>	65-85mm/2.6-3.4"	5	±6μm	108°	B
<b>3590-1055A</b>	85-105mm/3.4-4.2"	5	±6μm	108°	B
<b>3590-257A</b>	5-25mm/0.2-1.0"	7	±4μm	128°34'17"	B
<b>3590-457A</b>	25-45mm/1.0-1.8"	7	±4μm	128°34'17"	B
<b>3590-657A</b>	45-65mm/1.8-2.6"	7	±5μm	128°34'17"	B
<b>3590-857A</b>	65-85mm/2.6-3.4"	7	±5μm	128°34'17"	B